

Tamlite Contractor Series III





* Lamps not included for all fixtures



4" inch : Housings & Trims

BL4ICNAT-N

- Max Lamp wattage based on trim
- 120V operation voltage
- For new work applications
- Thermally-protected
- Adjustable housing for various ceiling thickness
- UL listed for damp location, feed through wiring, and direct contact with insulation
- Sealed housing to prevent airflow
- Pre-installed nails for fast installation
- Pre-wired J-box with snap-on cover



BL4NAT-N

- Max Lamp wattage based on trim
- 120V operation voltage
- For new work applications
- 3" clearance from insulation required
- Adjustable housing for various ceiling thickness
- UL listed for feed through wiring and damp location
- Sealed housing to prevent airflow
- Pre-installed nails for fast installation
- Pre-wired J-box with snap-on cover



BL4RAT


- Max Lamp wattage based on trim
- 120V operation voltage
- For old work and remodel applications
- 3" clearance from insulation required
- Adjustable housing for various ceiling thickness
- UL listed for feed through wiring and damp location
- Sealed housing to prevent airflow
- Pre-wired J-box with snap-on cover

BL108
CASE
QTY: 12



White Stepped Baffle
5" O.D.
50W - R20/PAR20

BL103
CASE
QTY: 12



Black Stepped Baffle
5" O.D.
50W - R20/PAR20

BL140
CASE
QTY: 12



White Albalite Shower
5" O.D.
50W - R20/PAR20

BL105
CASE
QTY: 12



White Eyeball
5" O.D.
50W - R20/PAR20

For a full range of recessed products please ask about our Deluce recessed lighting series.



is available only from Tamlite through your local CES branches



6" inch : Housings & Trims

* Lamps not included for all fixtures

BL9ICNAT-N

- Max Lamp wattage based on trim
- 120V operation voltage
- For new work applications
- Thermally-protected
- Adjustable lamp height
- UL listed for damp location, feed through wiring, and direct contact with insulation
- Sealed housing to prevent airflow
- Pre-installed nails for fast installation
- Pre-wired J-box with snap-on cover



CASE QTY: 6 90W max

BL9ICNAT-QN

- Max Lamp wattage based on trim
- 120V operation voltage
- For new work applications
- Thermally-protected
- Adjustable lamp height
- UL listed for damp location, feed through wiring, and direct contact with insulation
- Sealed housing to prevent airflow
- Pre-installed nails for fast installation
- Pre-wired J-box with snap-on cover and quick connects



CASE QTY: 6 90W max

BL9ICRAT

- Max Lamp wattage based on trim
- 120V operation voltage
- For old work or remodel applications
- Thermally-protected
- Adjustable lamp height
- UL listed for damp location, feed through wiring, and direct contact with insulation
- Sealed housing to prevent airflow
- Pre-wired J-box with snap-on cover



CASE QTY: 6 90W max

BL12
CASE QTY: 12



White Open Trim
8" O.D.
75W - R30/PAR30

BL34
CASE QTY: 12



White Stepped Baffle
7": 7^{3/4}" O.D. (Both Rings Included)
75W - R30/PAR30

BL17
CASE QTY: 12



Black Stepped Baffle
7" O.D.
75W - R30/PAR30

BL35
CASE QTY: 12



White Air-tight Baffle Cone
8" O.D.
90W-BR40: 75W-R30/PAR30

BL40
CASE QTY: 12



White Albalite Shower
8" O.D.
40W - A19

BL15
CASE QTY: 12



White Eyeball
8" O.D.
75W - R30/PAR30



Bulk Pack : Bath Vent Fan




CSA
C US
CASE
QTY: 6

TERBFV50BA

› Housing and Duct Adapter

- 50 CFM / 3.5 SONE
- Galvanized steel housing
- Built-in mounting tabs
- Built-in junction box
- Molded 3" duct adapter
- CSA listed for damp location
- Operating Voltage 120V

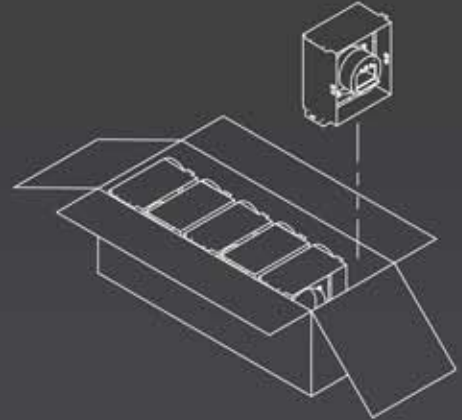


CSA
C US
CASE
QTY: 6

TERBFV50BB

› Grill and Motor

- 50 CFM/ 3.5 SONE
- Attractive molded off white grill
- Built in galvanized steel mounting bracket for a secure fit
- Independently tested for CFM and SONE rating
- CSA listed for damp location
- Operating Voltage 120V

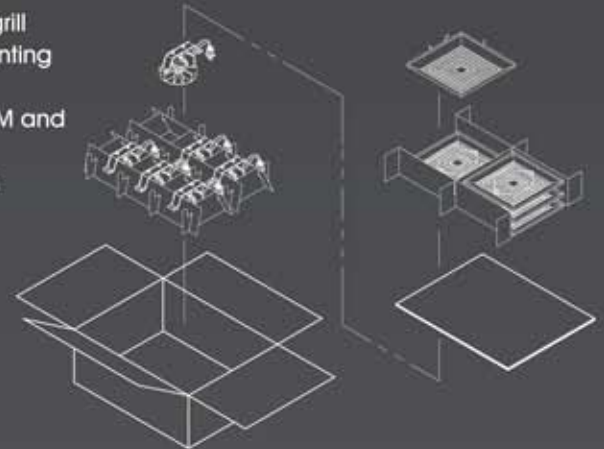



Linear : Fluorescent

* Lamps not included for all fixtures

WL2432ERES

- 120 operating voltage
- Cold-rolled steel housing
- Powdercoat painted enamel finish
- Acrylic prismatic lens
- UL Listed
- No sharp edges for safe handling and installation

WL	2	4	32	E	RES
SERIES: WRAP LIGHT	QTY OF LAMPS: 2: 2 LAMP	LENGTH: 4: 4'	WATTAGE: 32: 32 WATT (T8)	ELECTRONICS: E: ELECTRONIC BALLAST	STYLE: RES: RESIDENTIAL



CASE QTY: 1

NCF2217E : NCF2432E

- 120 operating voltage
- Compressable, closed-cell neoprene gasket
- Acrylic prismatic lens
- Latches have cam action
- UL Listed for wet/damp location

NCF	2	2	17	E
SERIES: ENCLOSED & GASKETED	QTY OF LAMPS: 2: 2 LAMP	LENGTH: 2: 2' 4: 4'	WATTAGE: 17: 17 WATT (T8) 32: 32 WATT (T8)	Ballast: E: Electronic Ballast



CASE QTY: 1

CSTSC2432P

- 120 operating voltage
- Powdercoat painted enamel finish
- UL Listed for damp location
- No sharp edges for safe handling and installation

CSTSC	2	4	32	P
SERIES: STRIP LIGHT	QTY OF LAMPS: 2: 2 LAMP	LENGTH: 4: 4'	WATTAGE: 32: 32 WATT (T8)	PACKAGE: P: 2 PACK



CASE QTY: 2





* Lamps included for all fixtures

: Flood & Wallpacks



CFMHQ175L

- 175W MH quad tap with lamp
- Die-cast housing with hinged front frame
- Chromate conversion coating
- Textured bronze finish
- Tempered glass lens
- Aluminum reflector
- Adjustable knuckle with angle indicators and 1/2" threads
- Porcelain medium base socket



CWPMHQ175L

- 175W MH quad tap with lamp
- Anodized aluminum reflector and borosilicate glass diffuser
- Corrosion-resistant die-cast aluminum housing
- Borosilicate glass diffuser with silicone gasket
- Threaded hubs for field installation of photocell or conduit



CWPMHQ400L

- 400W MH quad tap with lamp
- Anodized aluminum reflector and borosilicate glass diffuser
- Corrosion-resistant, die-cast aluminum housing withstands
- Heat resistant glass diffuser with silicone gasket
- Threaded hubs for field installation of photocell or conduit





Other Products Offered Through Tamlite



Door Chimes



MES Series

Decorative Push Buttons



MES Series

Decorative Fixtures



TA Series

Bathfans



TER Series



Floods



SF Series

Accents



ACC Series

Bollards



B Series

Darksy Compliant Ocelot



OSC Series

Canopies



MC/SC Series

FLUORESCENT

2 x 4 Lay-ins



S-Parabolic Series
T-Standard Series

T5 High Bays



HOR Series

2 x 2 Lay-ins



S-Parabolic Series
T-Standard Series

The Power To Supply

N
A
T
I
O
N
A
L
S



All specifications contained in this catalog are subject to change, with or without notice. All data is typical and for guidance only. Product illustrations and dimensions are typical and may change without notice. Please verify all specifications when you place your order. All electrical wiring and installation of lighting fixtures should be done by a qualified electrician. Tamlite takes no responsibility for products installed by anyone other than a qualified electrician and does not warranty products installed by non-professionals.