

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

DESCRIPTION

The TS series of specification grade, high performance luminaries are designed for general illumination in commercial, industrial and retail lighting application. The 4 1/2" deep, painted after fabrication (PAF), housing offers superior light performance and diffusion.

CONSTRUCTION

Hot dipped galvanized uni-body construction with built-in tabs for structural integrity. Specific body design for each lamp configuration limiting holes for a streamlined design. Oversized access plate for ease of installation. PAF for consistent finish, safe handling, and corrosion resistance. Baked white enamel provides a high reflectance factor. Built in earthquake/hurricane clips. NEMA type G (Grid) standard. All lamps may be installed or removed in any order, 3 3/16" lamp to lens for better light dispersion. All fixtures are 100% tested at the factory.

ELECTRICAL SYSTEM

T8 Ballast Information:

Standard ballast is electronic instant start, thermally protected, resetting, Class P, non-PCB, UL listed, and sound rated A.

LISTING

Fixtures are UL Listed and suitable for damp locations.


WARRANTY

Guaranteed for one year against mechanical defects in manufacture.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


Specification Troffer

TS Series - 1' x 4'

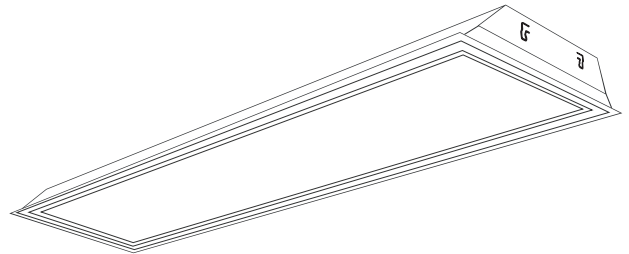

Dimensions 1'x4'

Length: 47-3/4"
 Width: 11-3/4"
 Depth: 4-1/2"

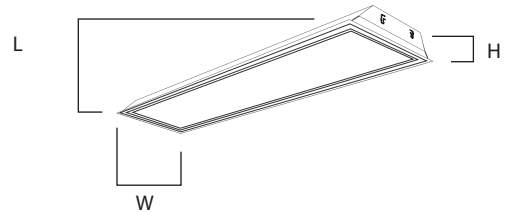

ORDERING INFORMATION - TS SERIES 1' X 4'

SAMPLE PART CODE: TS14-232D1P1L735

