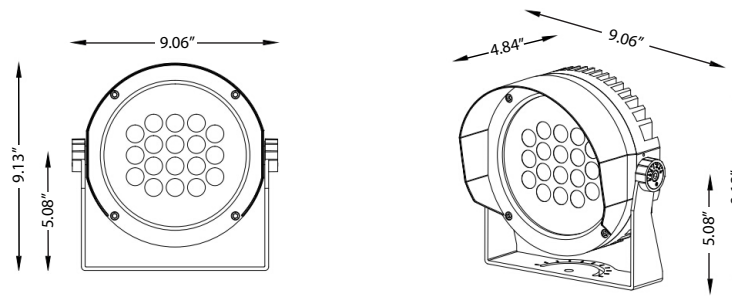


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS
AAFL SERIES

Highlight architectural features or add emphasis to landscaping with the efficiency and flexibility of RGBW LED technology. Select from millions of color combinations including 3000K white. The IP65 rated die-cast aluminum housing make this fixture built to last.


LINE DRAWING

CONSTRUCTION

Beam Angle
30°

Gasket Material
Silicon

NEMA Type
4 H x 4 V

ELECTRICAL SPECIFICATIONS

Input Voltage
24 VDC

Operating Current
2734mA

Wattage
74W

LED Wattage
3W

CCT
3000K

Voltage insulation
0.5KV 3S


Ground Impedance
> 20

Lumens
2772*

MODEL :	TYPE
PROJECT :	
PREPARED BY :	DATE :


PHOTOMETRIC ISOLINES

ISOCANDELA REPORT

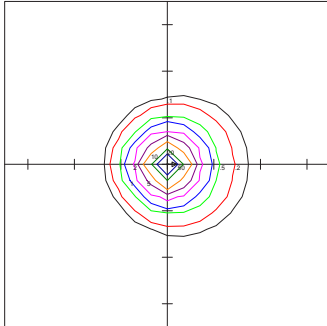

TAMLITE LIGHTING HID
AAFL-RGBW74ZGR-24
 Horizontal Footcandles
 Scale: 1 Hash = 10 Ft.
 Light Loss Factor = 1 Lumens Per Lamp
 = N.A.
 Lumens = 2816
 Mounting Height = 10 Ft.
 Maximum Calculated Value = 108.48 Fc
 Arrangement: Single

POLAR GRAPH



Polar Graph
 Maximum Candela = 10848.48
 Located at Horizontal Angle = 0
 Vertical Angle = 0

CERTIFICATIONS/WARRANTY

Location Rating:

Suitable for Wet locations

IP Rating

IP65

Warranty

Guaranteed for three years from the purchase date of the product, against mechanical defects in manufacturing.

ORDERING INFORMATION

Part Number: AAFL-RGBW74GR-24

Weight: 2.6Kg

AAFL	-RGBW	74	GR	-24
SERIES	STYLE	WATTAGE	COLOR	VOLTAGE
AAFL	[-RGBW] : Red, Green, Blue, White	[74] : 74W	[GR] : Grey	[24] : 24V

NOTES

*Lumens will vary based on color.