



MODEL:		TYPE
PROJECT:		
PREPARED BY:	DATE:	



BLED2R-Q LED SERIES

The BLED2R-Q LED 2" LED remodel can with driver, can and module for new construction offers up to 75% of energy savings in comparison to incandescent sources.



FEATURES AND SPECIFICATIONS

INTENDED USE:

Recessed remodel housing. Approved for non-insulated ceilings and all wiring types.

CONSTRUCTION:

Galvanized steel construction.

ELECTRICAL:

120V input voltage consuming 9 watts. Driver disconnect is provided where required to comply with U.S. and Canadian codes.

DIMMING:

Dimmable with most standard incandescent and low voltage dimmers.

INSTALLATION:

Two clips provided to secure can to housing on remodel cans.

LISTINGS:

UL listed to US and Canadian safety standards. Damp location listed (not suitable for coastal/salt water area). For use in ambient operating temperatures ranging from -30°C to 40°C. Meets State of California Title 24 requirements.

WARRANTY:


5-year limited warranty. Complete warranty terms located at:

www.tamliteusa.com/CustomerResources/Terms_and_conditions.asp

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWING

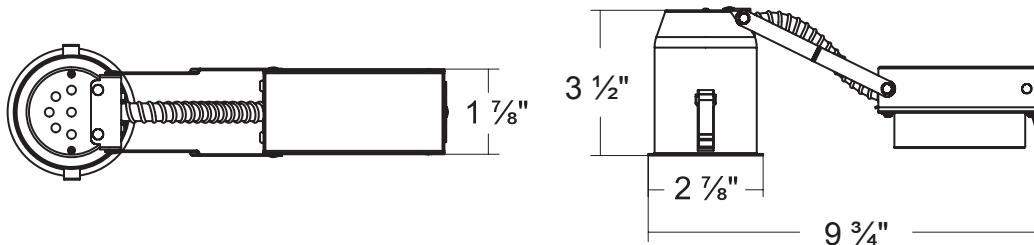

ORDERING INFORMATION

BLED	2	R	-Q
SERIES	SIZE	TYPE	Quick Connect
BLED	[2] : 2"	[R] : Remodel	[-Q] : Quick Connect

