

MODEL :	TYPE	
PROJECT :		
PREPARED BY :	DATE :	

SPECIFICATIONS


CT SERIES

The CT4 series of fluorescent fixtures are suitable for wet environments. With an IP67 rating they can be used in many locations that need a more capable or robust design such as food processing facilities, car-washes or where high pressure wash down is required.



LINE DRAWING

4 LAMP

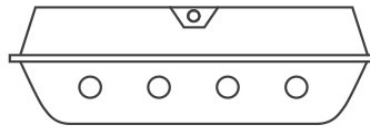

DIMENSIONS
4'

L
51 15/16 "

W
14 3/4 "

H
6 1/8 "

CONSTRUCTION

DESCRIPTION

The CT4 series of fluorescent fixtures are suitable for wet environments. With an IP67 rating they can be used in many locations that need a more capable or robust design such as food processing facilities, car-washes or where high pressure wash down is required.

ACCESSORIES

Stainless latches included
Hanging bracket mounting hardware included

HOUSING

One piece molded reinforced fiberglass housing for strength and durability
Injection molded ribbed acrylic high impact diffuser
Poured-in-place continuous sealing gasket
Removable end plug for installation of 1/2" conduit for end to end connection

LISTINGS/RATINGS

LISTINGS/RATINGS/COMPLIANCE

Fixtures are UL listed and suitable for wet locations.

Fixtures are IP67 rated: protected from dust ingress and liquid immersion between 15 centimeters and 1 meter in depth.

WARRANTY

WARRANTY

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Code: CT4454D

CT	4			D	
SERIES	LAMP QTY	LENGTH	LAMP WATTAGE	VOLTAGE	BALLAST OPTION
CT	[4] : 4 Lamp	[4] : 4ft	[32] : 32W T8 [54] : 54W T5HO	[D] : 120-277V	[BLANK] : No Options [K] : 120-277V (2 ballast) [PS] : 120-277V Program Rapid Start(T8 ONLY) [-DIM] : 120-277V 0-10V Series Elec. Dimming [-LPF] : 0.77 Low Ballast Factor 120-277V(T8 ONLY) [-HPF] : 1.18 High Ballast Factor 120-277V(T8 ONLY) [B1] : Emerg. 500 Lum. 1 Lamp [B2] : Emerg. 1400 Lum. 1 Lamp [B3] : Emerg. 1400 Lum. 2 Lamp