



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

CWSD

Contour Down Light

HOUSING:

The Contour Down Light (CWSD) Series has a die-cast aluminum housing, bronze powdercoat finish.

REFLECTOR:

Formed aluminum reflector

LENS:

Flat tempered glass lens

SOCKET:

HID: Porcelain 4KV pulse rated medium base socket with nickel-plated screw shell.

PL: Plug-in type, 4 Pin, GX24Q-4

MOUNTING:

Mount over a 4" recessed outlet box. Includes Easy-Hang "Two Hands Free" wall mounting bracket.

SOURCE / WATTAGE:

High Pressure Sodium: 35W to 150W

Metal Halide: 50W to 150W

Compact Fluorescent: 26W to 42W (1x26, 1x32, 1x42)

120-277V electronic ballast


LISTING & RATINGS:

UL or CSA: Listed for wet locations.



WARRANTY:

Guaranteed for one year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

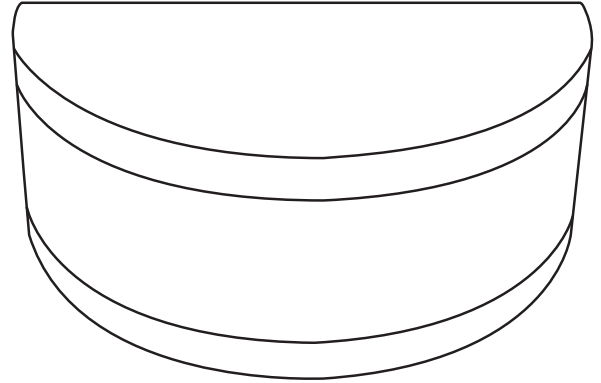

DIMENSIONS DATA

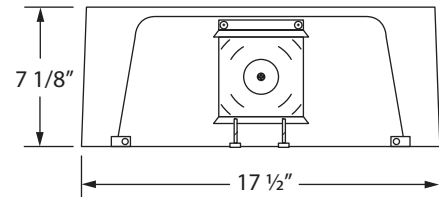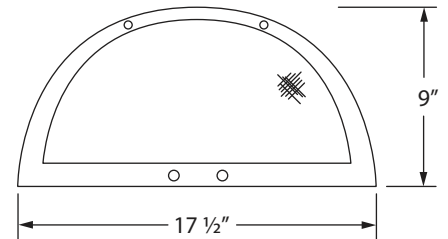

Max. Weight 22 lbs.



TAMLITE LIGHTING



SPECIFICATION & FEATURES

CWSD

Contour Down Light

ORDERING INFORMATION (HID)

CATALOG#	DESCRIPTION	VOLTAGE	BALLAST
HIGH PRESSURE SODIUM			
CWSDHPA35L	35 WATT HPS	120	R-NPF
CWSDHPA50L	50 WATT HPS	120	R-NPF
CWSDHPA70L	70 WATT HPS	120	R-NPF
CWSDHPA100L	100 WATT HPS	120	R-NPF
CWSDHPA150L	150 WATT HPS	120	R-NPF
CWSDHPQ70L	70 WATT HPS	120/208/240/277	HX-HPF
CWSDHPQ100L	100 WATT HPS	120/208/240/277	HX-HPF
CWSDHPQ150L	150 WATT HPS	120/208/240/277	HX-HPF
PULSE START METAL HALIDE			
CWSDMHQ50L	50 WATT MH	120/208/240/277	HX-HPF
CWSDMHQ70L	70 WATT MH	120/208/240/277	HX-HPF
CWSDMHQ100L	100 WATT MH	120/208/240/277	HX-HPF
CWSDMHQ150L	150 WATT MH	120/208/240/277	HX-HPF
Lamp(s) included			

NOTES:

CONSULT FACTORY FOR BALLAST INFORMATION

ORDERING INFORMATION (FLUORESCENT)

CATALOG#	DESCRIPTION	VOLTAGE	BALLAST
CWSD1X26DL ¹	26 WATT PL	120-277	ELECTRONIC
CWSD1X32DL ¹	32 WATT PL	120-277	ELECTRONIC
CWSD1X42DL ¹	42 WATT PL	120-277	ELECTRONIC
¹ Battery back-up available by adding "B1" to end of part code for 120V or "B2" for 277V.			
Lamp(s) included			

NOTES:

Electronic fluorescent ballasts are high power factor, Class P insulation, 120-277V, and have a starting temperature of 0° F (-18° C).

Battery backup provides up to 90 minutes of power for two (2) lamps (depending on wattage), and has an operating temperature range of 32° to 122° F (0° to +50° C).

CONSULT FACTORY FOR BALLAST INFORMATION

Application and Performance Specification Information is Subject to Change Without Notification