

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## SERIES SPECIFICATIONS



### DCLED SERIES

The DCLED is an expertly designed indoor cylinder light fixture. Assembled with LED technology, the DCLED offers all architects and designers various options from lumen outputs, driver controls and color finishes.



## CONSTRUCTION/ CERTIFICATIONS/ WARRANTY

**Housing Material**  
Seamless spun aluminum

**Reflector**  
Aluminum Alzak

**Housing Thickness**  
0.060 In.

**Aperture Size**  
6"

**Listings**  
UL listed to US safety standards. Suitable for damp locations.

**Dimmable**  
0-10v dimming


**Warranty**  
5-year limited warranty

## ELECTRICAL SPECIFICATIONS

	1500 LM	3000 LM
<b>Input Voltage</b>	100-277VAC ±10%	100-277VAC ±10%
<b>Input Current</b>	0.2A	0.3A
<b>Frequency</b>	50-60Hz	50-60Hz
<b>Wattage</b>	21.2	33.6
<b>Ambient Temp.</b>	-20°C ~ 50°C	-20°C ~ 50°C

\*Please consult factory for list of approved dimmers

## LINE DRAWINGS

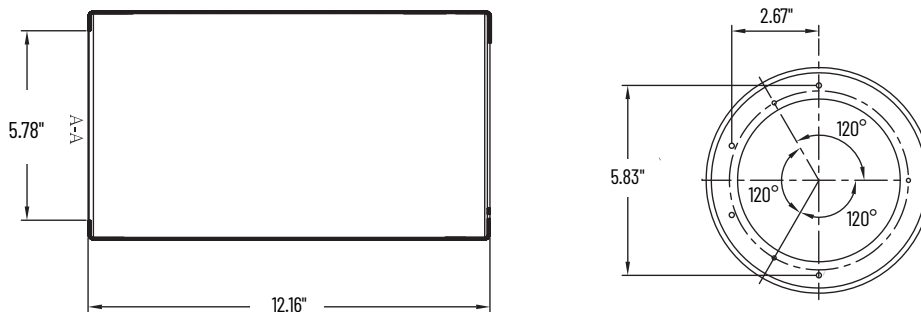



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## ORDERING INFORMATION

**Example:** DCLED6-15D1-P-3-WH-WH

SERIES	SIZE	LUMENS	MOUNTING	COLOR TEMP	HOUSING FINISH	REFLECTOR	EMERGENCY OPTION
DCLED	[6] : 6"	[-15D1]: 1500Lm [-30D1]: 3000Lm	[-P] : Pendant* [-C] : Ceiling Mount [-S] : Suspended**	[-3] : 3000K [-4] : 4000K [-5] : 5000K	[-WH] : White [-BK] : Black	[-CL] : Clear [-WH] : White	[BLANK] : No Option [EM] : Emergency Back up

\*Downrod supplied by others.

\*\*48" cord provided.

Please note DCLED ships standard with white cord & canopy, if black is needed please order CH48"-CORD-5WIRE-DIM-BLACK separately.

## PERFORMANCE SPECIFICATIONS

SPECTRAL POWER DISTRIBUTION & CHROMATICITY DIAGRAM

