



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

DESCRIPTION



DSLED Series

Die-cast aluminum housing and hinged front frame, coin plugs with O-rings for 1/2" conduit entry or photocell on two sides and top, corrosion resistant external stainless steel screws, and bronze powdercoat finish.



CONSTRUCTION

Housing

Die-cast aluminum housing and hinged front frame

Finish

Bronze powdercoat

Light Source

LED

Lens

Clear high transmission polycarbonate optic plate

Coin Plugs

1/2" with O-rings for conduit or photocell 4: left, top, right side and back

Dimming

0-10V dimmable

Listings


UL listed to US safety standards. Suitable for wet locations.

Warranty

5-year limited warranty.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

LINE DRAWING

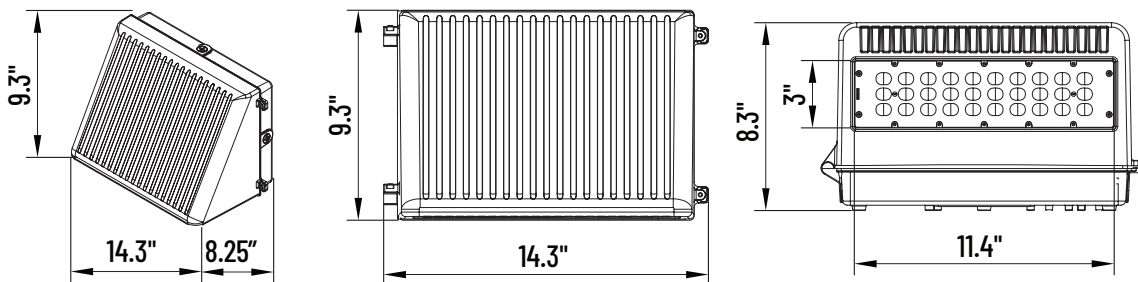

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

ORDERING INFORMATION

EXAMPLE: DSLED505K

Series	Wattage	Color Temp.	Options
DSLED	[50] : 50 Watts [80] : 80 Watts	[5K] : 5000K	[EM] : Battery Backup [PC] : Photocell

PERFORMANCE SPECIFICATIONS

	50W	80W
Input Voltage	100-277VAC	100-277VAC
Input Current	0.52A Max	1.0A Max
Power Factor	0.9	0.9
Efficacy	141+ LM/W	143+ LM/W
Color Temp	5000K	5000K
Frequency	50/60Hz	50/60Hz
Lifespan	50000Hrs.	50000Hrs.
CRI	>80	>80
Duv	0.0041	0.0005
Distribution	Full Cutoff - Type III	Full Cutoff - Type III
Lumens	6649+ Lumens	10910+ Lumens

APPLICATION AND PERFORMANCE SPECIFICATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION