



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

DESCRIPTION:

The EXD Series die cast aluminum LED exit signs offer long lamp life, energy efficiency and uniform illumination in an economical package.

CONSTRUCTION:

The EXD has a die cast aluminum housing and faceplate, pre-drilled canopy attachment locations with easily removed hole covers. Snap-fit faceplate has 6" letters with 3/4" stroke width. The chevron directional indicators can be easily removed or reinserted as necessary. Comes in red or green letters. Available in a wide variety of finishes (see Ordering Information for details).

ILLUMINATION:

Long life, energy saving LED lamps, red or green LED/letters, red and green signs consume less than 3.5 watts.

ELECTRICAL:

Dual 120V/277V voltage rated for use in damp locations has AC power indicator and LVD (low voltage disconnect) prevents battery from deep discharge. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Long-life, maintenance-free, rechargeable NiCd battery (EM model).

OPTIONS:

SD: Self-Diagnostic continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes.

TP: **Tamper Proof** screws in corners seal the unit, preventing access to unauthorized personnel.

CODE COMPLIANCE:

UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code compliant, NEC and OSHA compliant.

MOUNTING:

Includes die cast aluminum canopy may be top, back or side mounted. All signs include quick-install snap-fit canopy and mounting hardware for easy top or side mount installation. Includes backplate with universal J-box mounting pattern knockouts for simple mounting.

WARRANTY:

Guaranteed for five (5) year against mechanical defects in manufacturing. Batteries are pro-rated warranted for five (5) years.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

ORDERING INFORMATION

EXD


Sample Part Code: EXD1RWAEM

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	FACE COLOR	OPERATION	OPTIONS
EXD: EXD Series	1: Single 2: Double Face	R: Red G: Green	A: Brushed Aluminum W: White B: Black	A: Brushed Aluminum W: White B: Black	EM: Battery Backup BLANK: A/C only	BLANK: No options SD: Self Diagnostics TP: Tamper Proof

EXD Series Die Cast Aluminum Exit



DIMENSIONS DATA

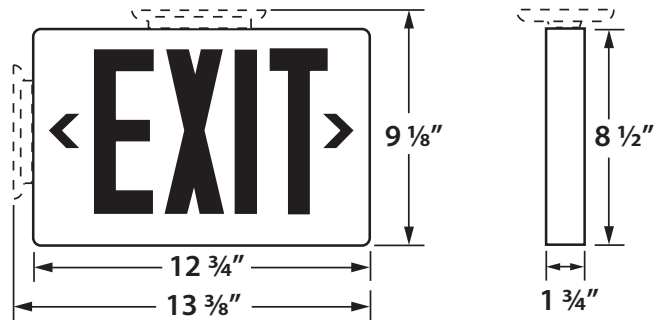

ENGINEERING DATA

	INPUT VOLTAGE	MAX. AMPS	MAX. WATTS	STANDBY WATTS*
Red LED	120	0.03	3.3	2.8
Red LED	277	0.01	3.6	3.1
Green LED	120	0.03	3.5	3.1
Green LED	277	0.02	3.9	3.4

* Fully charged battery.