



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

HOUSING:

Heavy duty die-cast white aluminum housing, chromate conversion coating, electrical box with integral slotted adjustment to distribute weight when installing on sloped ceilings, malleable hook, adjustable reflector mounting bracket.

REFLECTOR:

16" aluminum with four keyhole slots for easy mounting

LENS:

Standard: None

Optional: Acrylic drop lens (ALL HPS, Pulse Start 250W only)

Flat glass lens (ALL HPS, PSMH)

SOCKET:

Porcelain 5KV pulse/open rated mogul base socket with nickel-plated screw shell

MOUNTING:

Mount with included malleable hook or pendant mount with swivel type box plates (HBSWVLRND or HBSWVLSQ) sold separately, downrod to be provided by others

ELECTRICAL:

High Pressure Sodium: 250W to 400W

Pulse Start: 250W to 400W

Optional quartz restrike available, includes timed module, bracket with socket, and 150W quartz lamp (add "R" to end of part code)

LISTING & RATINGS:

CSA: Listed for dry locations

WARRANTY:

Guaranteed for one year against mechanical defects in manufacture

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


ACCESSORIES

CATALOG#	DESCRIPTION
HBSWVLSQ	3/4" PENDANT SWIVEL SQUARE BOX PLATE
HBSWVLRND	3/4" PENDANT SWIVEL ROUND BOX PLATE
HBHOOK	HIGH BAY HOOK (INCLUDED WITH FIXTURE)
BAYLKACC6	ACRYLIC LENS KIT
BAYLKGL16	GLASS LENS KIT
HBSC10	10' ADJUSTABLE HIGH BAY SAFETY CABLE
CORD120KT	36" 120V CORD, NEMA L5-15P PLUG
CORD250KT	36" 250V CORD, NEMA L6-15P PLUG
CORD277KT	36" 277V CORD, NEMA L7-15P PLUG
HBWG16AL ¹	WIRE GUARD


¹ CANNOT BE USED WITH ACRYLIC DROP LENS

HB

16" Aluminum High Bay

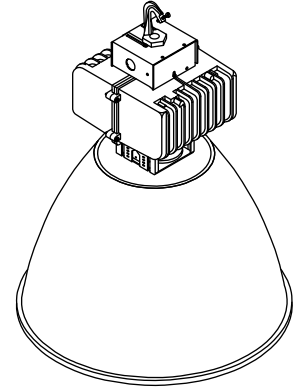

DIMENSIONS/MOUNTING DATA

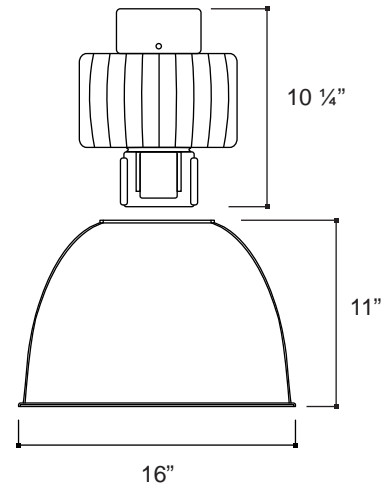

Max. Weight: 24 LBS.

ORDERING INFORMATION

HB	P	Q	400	L	AL6	GL	277	R
SERIES		VOLTAGE		LAMP		LENS		RESTRIKE
HB: HIGH BAY		E: 480V Q: 120/208/240/277V		BLANK: NO LAMP L: LAMP INCLUDED (OPEN RATED) ALL MH MODELS		BLANK: NO LENS DL: ACRYLIC DROP LENS AVAIL. ALL HPS MODELS & 250W PS MH ONLY GL: GLASS LENS ALL HPS & PSMH		BLANK: NO QUARTZ RESTRIKE R: 150W QUARTZ RESTRIKE WITH TIMED MODULE AND LAMP
	SOURCE		WATTAGE		REFLECTOR		CORD KIT	
	HP: HIGH PRESSURE SODIUM P: PULSE START METAL HALIDE		HIGH PRESSURE SODIUM 250 400 PULSE START METAL HALIDE 250 320 350 400		16" DIAMETER ALUMINUM REFLECTOR		BLANK: NO CORD 120: 3' 120V CORD W/L5-15P PLUG 250: 3' 250V CORD W/L6-15P PLUG 277: 3' 277V CORD W/L7-15P PLUG	