



# TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986  
tel: (772) 878-4944 or on the web at [www.tamliteusa.com](http://www.tamliteusa.com)

## SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

### HOUSING:

Heavy duty die-cast white aluminum housing, chromate conversion coating, electrical box with integral slotted adjustment to distribute weight when installing on sloped ceilings, malleable hook, adjustable reflector mounting bracket.

### REFLECTOR:

22" aluminum reflector with four keyhole slots for easy assembly

### LENS:

Standard: None  
Optional: Acrylic drop lens or flat glass lens

### SOCKET:

Porcelain 5KV pulse/open rated mogul base socket with nickel-plated screw shell

### MOUNTING:

Mount with included malleable hook or pendant mount with swivel type box plates (HBSWVLRND or HBSWVLSQ) sold separately, downrod to be provided by others

### ELECTRICAL:

High Pressure Sodium: 250W to 400W  
Pulse Start: 250W to 400W  
Optional quartz restrike available, includes timed module, bracket with socket, and 150W quartz lamp (add "R" to end of part code)

### LISTING & RATINGS:

CSA: Listed for dry locations

### WARRANTY:

Guaranteed for one year against mechanical defects in manufacture

\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*


### ACCESSORIES

CATALOG#	DESCRIPTION
HBSWVLSQ	3/4" PENDANT SWIVEL SQUARE BOX PLATE
HBSWVLRND	3/4" PENDANT SWIVEL ROUND BOX PLATE
HBHOOK	HIGH BAY HOOK (INCLUDED WITH FIXTURE)
BAYLKACC6	ACRYLIC LENS KIT
BAYLKGL16	GLASS LENS KIT
HBSC10	10' ADJUSTABLE HIGH BAY SAFETY CABLE
CORD120KT	36" 120V CORD, NEMA L5-15P PLUG
CORD250KT	36" 250V CORD, NEMA L6-15P PLUG
CORD277KT	36" 277V CORD, NEMA L7-15P PLUG
HBWG16AL <sup>1</sup>	WIRE GUARD


<sup>1</sup> CANNOT BE USED WITH ACRYLIC DROP LENS

# HB

## 22" Aluminum High Bay

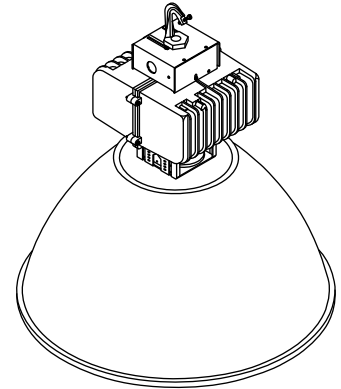

### DIMENSIONS/MOUNTING DATA

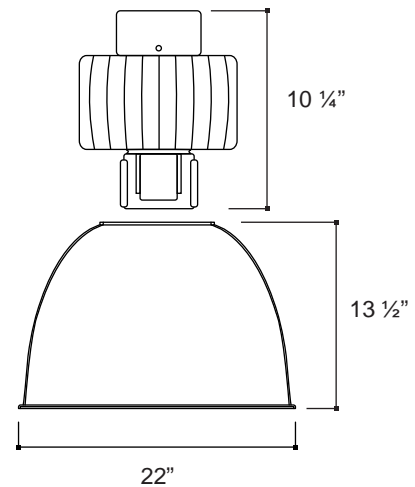

Max. Weight: 25 LBS.

### ORDERING INFORMATION

<b>HB</b>	<b>P</b>	<b>Q</b>	<b>400</b>	<b>L</b>	<b>AL2</b>	<b>DL</b>	<b>277</b>	<b>R</b>
SERIES		VOLTAGE		LAMP		LENS		RESTRIKE
HB: HIGH BAY		E: 480V Q: 120/208/240/277V		BLANK: NO LAMP L: LAMP INCLUDED (OPEN RATED) ALL MH MODELS		BLANK: NO LENS DL: ACRYLIC DROP LENS GL: GLASS LENS		BLANK: NO QUARTZ RESTRIKE R: 150W QUARTZ RESTRIKE WITH TIMED MODULE AND LAMP
	SOURCE		WATTAGE		REFLECTOR		CORD KIT	
	HP: HIGH PRESSURE SODIUM P: PULSE START METAL HALIDE		HIGH PRESSURE SODIUM 250 400 PULSE START METAL HALIDE 250 320 350 400		22" DIAMETER ALUMINUM REFLECTOR		BLANK: NO CORD 120: 3' 120V CORD W/L5-15P PLUG 250: 3' 250V CORD W/L6-15P PLUG 277: 3' 277V CORD W/L7-15P PLUG	