



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING:

Die-cast aluminum housing and hinged front frame, externally accessible wiring compartment, textured architectural bronze powdercoat finish over a chromate conversion coating.

REFLECTOR:

Aluminum reflector

LENS:

Tempered flat clear glass lens

SOCKET:

Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell

MOUNTING:

Includes stamped steel narrow trunion. Optional large mounting yoke (**IFBWide**) or adjustable die-cast slipfitter (**LFSW**) with angle indicators available.

ELECTRICAL:

High Pressure Sodium: 150W TO 400W
Metal Halide: 150W
Pulse Start: 250W to 400W

LISTING & RATINGS:


CSA: Listed for wet locations

WARRANTY:


Guaranteed for one year against mechanical defects in manufacture

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

ORDERING INFORMATION

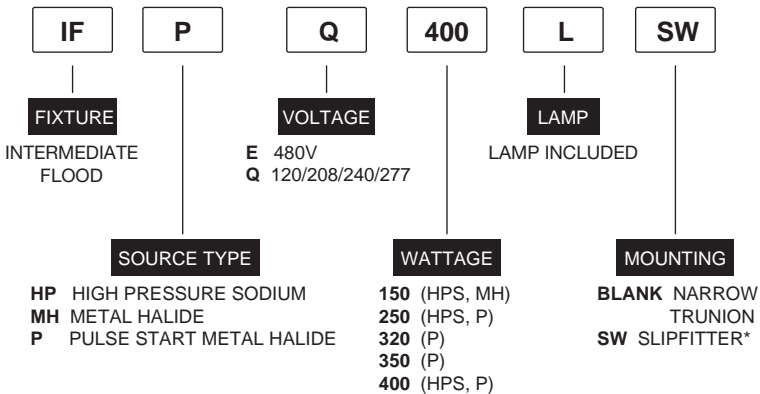


MOUNTING OPTIONS




TENON MOUNT SWIVEL(LFSW)*

* Optional adjustable slipfitter for tenon mounting. Add "SW" in mounting box when ordering.



NARROW TRUNION (IFBNARROW)

Comes Standard



WIDE TRUNION (IFBWide)

Order Separately


Catalog Number

Notes


Job/Title

IF

Intermediate Flood

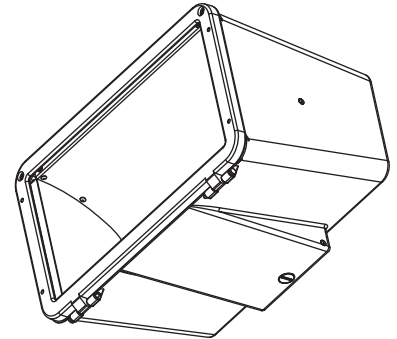

DIMENSIONS/MOUNTING DATA

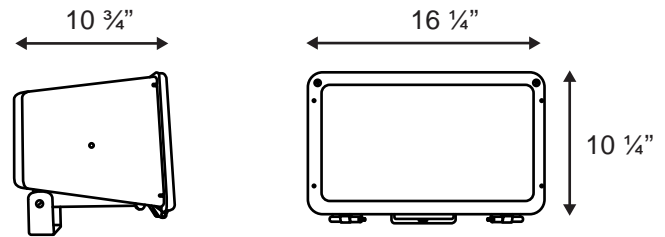

Max. Weight: 30 LBS.

ACCESSORIES

CATALOG#	DESCRIPTION
IF DOOR	DOOR & GLASS ASSEMBLY
IF2PTF	2-3/8" POLE TOP FITTER
IFBNARROW	TRUNION BRACKET (COMES STANDARD)
IFBWide	WIDE TRUNION BRACKET
IFGS KIT	GLARE SHILED KIT
IFLG KIT	POLYCARBONATE GUARD KIT
IFWG KIT	WIRE GUARD KIT