



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
 tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING:

Die-cast aluminum housing and hinged front frame, with stainless steel hinges and stainless steel hasps. powder coat finish over a chromate conversion coating. includes safety cable to prevent front frame impact when relamping. Gasketed access plate on bottom.

REFLECTOR:

Aluminum reflector

LENS:

Molded prismatic borosilicate glass lens.

SOCKET:

HID: Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell

ELECTRICAL:

High Pressure Sodium: 250W-400W
 Metal Halide: 250W to 400W

LISTING & RATINGS:

UL: Listed for wet locations.

WARRANTY:

Guaranteed for one year against mechanical defects in manufacturing

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


Catalog Number
Notes
Job/Title

LC

Large Canopy



DIMENSIONS DATA

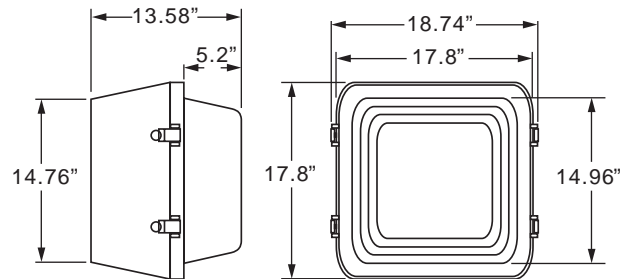


ORDERING INFORMATION (HID)

CATALOG#	DESCRIPTION	VOLTAGE	BALLAST
HIGH PRESSURE SODIUM			
LCHPQ250L	250 WATT HPS	120/208/240/277	CWA
LCHPE250L	250 WATT HPS	480	CWA
LCHPQ400L	400 WATT HPS	120/208/240/277	CWA
LCHPE400L	400 WATT HPS	480	CWA
PULSE START METAL HALIDE			
LCPQ250L	250 WATT PSMH	120/208/240/277	CWA
LCPE250L	250 WATT PSMH	480	CWA
LCPQ320L	320 WATT PSMH	120/208/240/277	CWA
LCPE320L	320 WATT PSMH	480	CWA
LCPQ350L	350 WATT PSMH	120/208/240/277	CWA
LCPE350L	350 WATT PSMH	480	CWA
LCPQ400L	400 WATT PSMH	120/208/240/277	CWA
LCPE400L	400 WATT PSMH	480	CWA
Lamp included			

PHOTOMETRIC DATA

LCPQ400L

ISO FOOT CANDLE LINES OF HORIZONTAL ILLUMINANCE

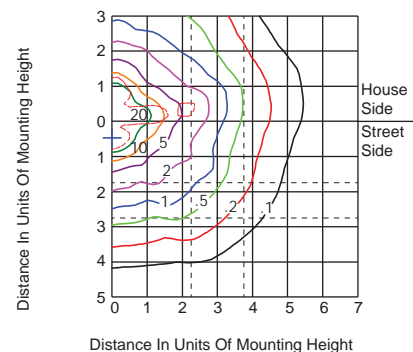

Values Based On 10 Foot Mounting Height
 1/2 Maximum Candela Trace Shown As Dashed Curve
 (+) = Maximum Candela Point
 Total Luminaire Efficiency 69.7 %