



# TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986  
tel: (772) 878-4944 or on the web at [www.tamliteusa.com](http://www.tamliteusa.com)



## SPECIFICATION & FEATURES

### DESCRIPTION:

Slim Profile Thermoplastic LED Exit Signs offer long lamp life, energy efficiency, and uniform illumination in an economical package.

### CONSTRUCTION:

Injection-molded, high impact, UV-stabilized UL 94 V-0 Thermoplastic housing. Snap-together construction speeds installation. Universal J-box pattern and universal mounting capabilities: top, back, or end mounting (canopy included). Universal Chevrons are easily removed from directional indication. Fully assembled single face with extra faceplate for easy field-conversion to double face.

### ILLUMINATION:

Long life, energy saving LED lamps, Red or Green LED/letters, Red and Green signs consume less than 5 watts.

### ELECTRICAL:

Dual 120V/277V voltage Rated for use in damp locations has AC power indicator and LVD (low voltage disconnect) prevents battery from deep discharge. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Long-life, maintenance-free, rechargeable NiCd battery (EM model).

### CODE COMPLIANCE:

UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code compliant, NEC and OSHA compliant.

### MOUNTING:

May be top, back or side mounted. All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation. Includes backplate with universal mounting pattern knockouts for simple back mounting.

### WARRANTY:

Guaranteed for five year against mechanical defects in manufacturing. Batteries are pro-rated warranted for 5 years.


\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*

Catalog Number
Notes
Job/Title

## LXP Series Thermoplastic Slim LED Exit



### DIMENSIONS DATA

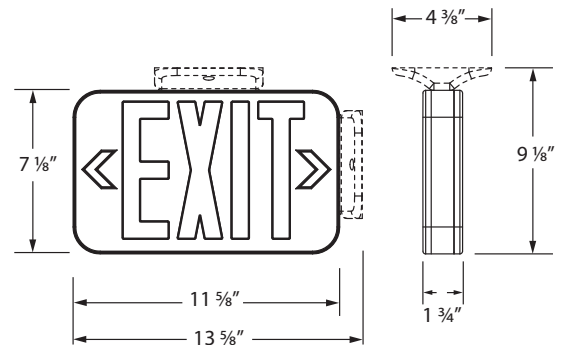

### ENGINEERING DATA

	INPUT VOLTAGE	MAX. AMPS	MAX. Watts
Red LED	120	0.019	1.49
Red LED	277	0.009	1.88
Green LED	120	0.019	1.49
Green LED	277	0.009	1.57

### ORDERING INFORMATION

## LXP

Sample Part Code: LXP3RWEM

