



FLUORESCENT

TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

APPLICATIONS:

The Louvered-T-Strip (LTS) is well Suited for areas where high lumen package in a compact fixture is required, such as retail stores, warehouses and manufacturing applications.

CONSTRUCTION:

23 Gauge cold rolled steel body for exceptional strength and durability. Designed for simple servicing. The louver assembly provides low glare appearance. End caps include knockouts for through wiring and fixture attachment for row mounting applications.

FINISH:

The powder coating is performed at post fabrication. It is applied electrostatically then heated to cure. This finish provides for better protection of the steel and also provides for better protection from very sharp and open edges. Parts are finished in a white high reflectance lighting grade baked enamel.

ELECTRICAL:


CONSULT FACTORY FOR BALLAST INFORMATION

WARRANTY:

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

LTS

Louvered-T-Strip Series

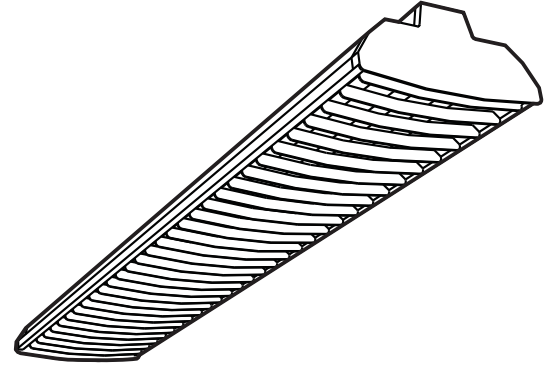

SPECIFICATIONS

LENGTH:	48"
WIDTH:	11 1/4"
DEPTH:	5"

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


ORDERING INFORMATION

LTS


Sample Part Code: LTS2454DB2

SERIES	LAMP QTY	LENGTH	LAMP WATTAGE	VOLTAGE	EMERGENCY BALLAST
LTS: Louvered-T-Strip LTSR: Louvered-T-Strip (R = Reflector)	2: 2 Lamp 3: 3 Lamp 4: 4 Lamp	4: 4'	32: 32W T8 *28: 28W T5 *54: 54W T5HO	A: 120V D: 120-277V	BLANK: No options B1: 500 lumens 1 lamp B2: 1400 lumens 1 lamp B3: 1400 lumens 2 lamp** Factory Installed **T8 only

LAMP CONFIGURATION

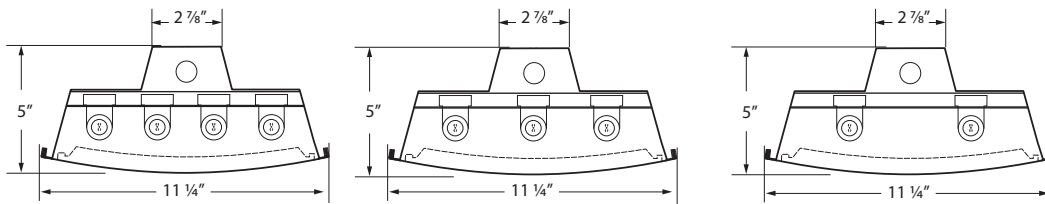

MOUNTING INFORMATION

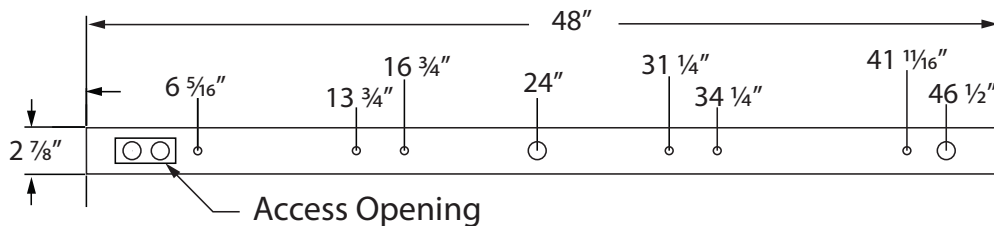

Application and Performance Specification Information is Subject to Change Without Notification