



# TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986  
tel: (772) 878-4944 or on the web at [www.tamliteusa.com](http://www.tamliteusa.com)

## SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

### HOUSING:

Heavy duty die-cast white aluminum housing, chromate conversion coating, electrical box with integral slotted adjustment to distribute weight when installing on sloped ceilings, malleable hook.

### REFLECTOR:

16" white powdercoated aluminum with four keyhole slots for easy mounting

### LENS:

16" acrylic drop lens: (250W to 400W HPS and 250W PSMH)  
16" flat glass lens: (320W to 400W PSMH)

### SOCKET:

Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell

### MOUNTING:

Mount with included malleable hook or optional swivel pendant mounts (**HBSWVLRND** or **HBSWVLSQ**) sold separately, downrod to be provided by others

### ELECTRICAL:

High Pressure Sodium: 250W to 400W  
Pulse Start: 250W to 400W  
Optional quartz restrike available, includes timed module, bracket with socket, and 150W quartz lamp (add "R" to end of part code)

### LISTING & RATINGS:

CSA: Listed for dry locations

### WARRANTY:

Guaranteed for one year against mechanical defects in manufacture

\*\*\* SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE\*\*\*

### ACCESSORIES



CATALOG#	DESCRIPTION
HBSWVLSQ	PENDANT SWIVEL, 3/4" PIPE, SQUARE PLATE
HBSWVLRND	PENDANT SWIVEL, 3/4" PIPE, ROUND PLATE
HBHOOK	HIGH BAY HOOK
HBHOOKSN	HIGH BAY HOOK SNAP
HBSC	39" HIGH BAY SAFETY CABLE
CORD120KT	36" 120V CORD, STRAIN RELIEF, NEMA L5-15P PLUG
CORD250KT	36", 250V CORD, STRAIN RELIEF, NEMA L6-15P PLUG
CORD277KT	36", 277V CORD, STRAIN RELIEF, NEMA L7-15P PLUG
HBWG16AL <sup>1</sup>	WIRE GUARD

<sup>1</sup> CANNOT BE USED WITH ACRYLIC DROP LENS

### DIMENSIONS/MOUNTING DATA

# LB

## 16" Aluminum Low Bay

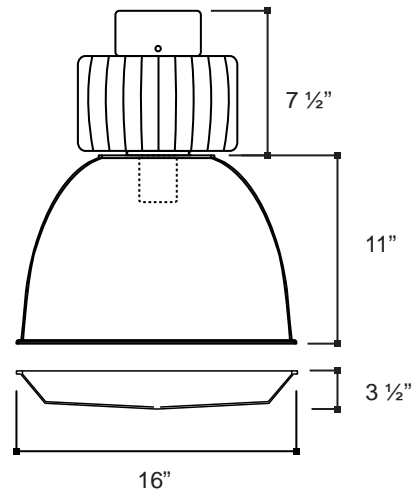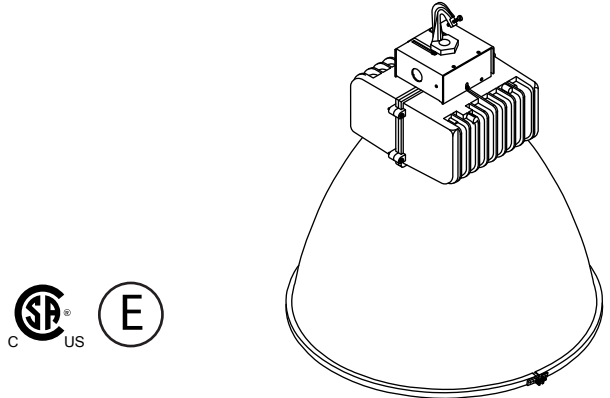

Max. Weight: 25 LBS.

### ORDERING INFORMATION

<b>LB</b>	<b>P</b>	<b>Q</b>	<b>250</b>	<b>L</b>	<b>AL6</b>	<b>277</b>	<b>R</b>
SERIES		VOLTAGE		LAMP		CORD KIT	
LB: LOW BAY		E: 480V Q: 120/208/240/277V		BLANK: NO LAMP L: LAMP INCLUDED		BLANK: NO CORD 120: 3' 120V CORD W/L5-15P PLUG 250: 3' 250V CORD W/L6-15P PLUG 277: 3' 277V CORD W/L7-15P PLUG	
	SOURCE		WATTAGE	REFLECTOR			RESTRICKE
	HP: HIGH PRESSURE SODIUM P: PULSE START METAL HALIDE		HIGH PRESSURE SODIUM 250 400 PULSE START METAL HALIDE 250 320 350 400	16" DIAMETER ALUMINUM REFLECTOR			BLANK: NO QUARTZ RESTRICKE R: 150W QUARTZ RESTRICKE WITH TIMED MODULE AND LAMP