



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING:

Injection molded plastic housing.

REFLECTOR:

Aluminum reflector

LENS:

Clear plastic lens with weatherproof gasket

SOCKET:

Plug-in type, GX23-2

MOUNTING:

2 1/2" stem with 1/2" NPT threads

ELECTRICAL:

Compact Fluorescent: 13W to 26W

FL10F13: (1x13)

FL10F26: (2x13) (2 Ballasts)

Lamp: 6500K color temp

120V magnetic ballast(s) with thermal protection

Lowest ambient striking temperature 0°C/32°F

LISTING & RATINGS:

CSA: Listed for wet locations

WARRANTY:


Guaranteed for one year against mechanical defects in manufacture

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


Catalog Number
Notes
Job/Title

FL10

Fluorescent Mini Flood

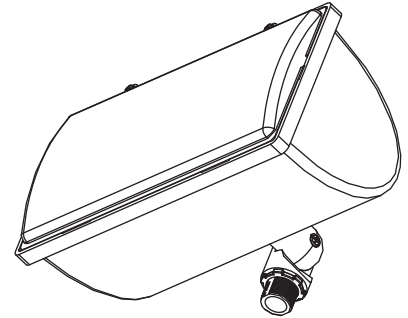

DIMENSIONS/MOUNTING DATA

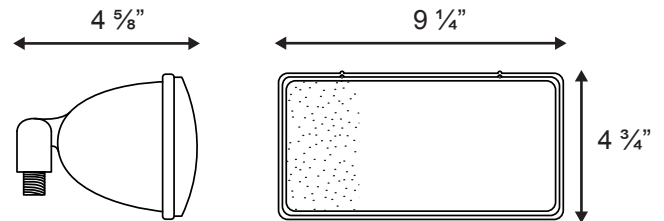

ORDERING INFORMATION

CATALOG#	DESCRIPTION	VOLTAGE	COLOR	BALLAST
Fluorescent				
FL10F13	13 WATT PL	120	BLACK	MAGNETIC
FL10F13BR	13 WATT PL	120	BRONZE	MAGNETIC
FL10F13GR	13 WATT PL	120	GREEN	MAGNETIC
FL10F13WH	13 WATT PL	120	WHITE	MAGNETIC
FL10F26	26 WATT PL	120	BLACK	MAGNETIC
FL10F26BR	26 WATT PL	120	BRONZE	MAGNETIC
FL10F26GR	26 WATT PL	120	GREEN	MAGNETIC
FL10F26WH	26 WATT PL	120	WHITE	MAGNETIC
Lamp(s) included				

ACCESSORIES

CATALOG#	DESCRIPTION
GRSTK	GROUND STAKE