

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

OMX SERIES

750 Lumen Emergency Fluorescent Ballast 120/277VAC with Time Delay



LINE DRAWING

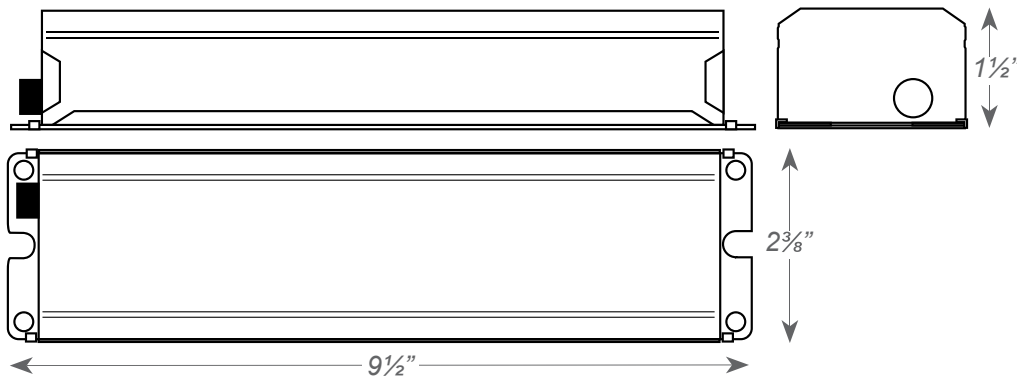

CONSTRUCTION

Housing
 Durable painted steel construction in white finish with 2' flex conduit

Test Switch
 LED illuminated test switch

Time Delay
 Time delay to overcome end of life circuit protection

ELECTRICAL SPECIFICATIONS

Battery Type 3.6V Rechargeable Ni-Cad	Emergency Illumination Minimum 90 Minutes	Battery Recharge Time 24 Hours
LED Indicator Charge rate/power "ON" and push to test switch	Frequency 50/60Hz	Battery Discharge Time 1.5 Hours
Operating Voltage 120/277	Operating Temp. 0°C ~ 50°C	Output Lumens 750 Max.

Output
 AC Output



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
OMX6500ACTD	3.8	3.8	0.270	0.270

LAMP COMPATIBILITY

Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.

Operates one 25W-40W T8 through T12, one 13W-42W 4-pin compact or one 18W-40W 4-pin long compact fluorescent lamps. Refer to lamp compatibility chart for a complete list of lamps.

LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS	LAMP	WATTS	INITIAL LUMENS
		1-Lamp			1-Lamp			1-Lamp
T8	32	675	4-Pin Long CF	26	575	4-Pin Long CF	18	525
T12	40	650	4-Pin Long CF	32	675	4-Pin Long CF	24	575
4-Pin PL CF	13	450	4-Pin Long CF	42	750	4-Pin Long CF	36	600
4-Pin PL CF	18	500				4-Pin Long CF	40	650

In 2-lamp operation, lumens are equally split between the two lamps

MOUNTING SPECIFICATIONS

Suitable for installation inside, on top or in remote* of the fixture

Can be used in both switched and unswitched fixtures

CERTIFICATIONS/WARRANTY

Listing
 UL Listed for factory or field installation

Compliance
 Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating:
 Suitable for damp locations.

Warranty
 Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: OMX6500-ACTD

OMX	6500	-ACTD
SERIES	LUMENS	OPTION
OMX	[6500] : 750 Lumens	[-ACTD] : Time Delay

NOTES

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.