



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING

Die-cast aluminum housing and hinged front frame, coin plugs with O-rings for 1/2" conduit entry or photocell, corrosion resistant external stainless steel screws, and bronze powdercoat finish

REFLECTOR

Formed aluminum reflector

LENS

Flat tempered clear glass lens.

SOCKET

Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell.

MOUNTING

Cast-in template for mounting directly over a 4" recessed box or use 1/2" surface mount conduit connection.

SOURCE/WATTAGE

High Pressure Sodium: 400W
Pulse Start Metal Halide: 320W to 400W

LISTINGS/RATINGS/COMPLIANCE

CSA or UL Listed
Suitable for wet locations
Dark sky compliant

WARRANTY

Guaranteed for one year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


Catalog #: Project:	01/06/2014
Project:	Type:
Prepared By:	

OSC Series

Ocelot Large Dark Sky



SPECIFICATIONS / DIMENSIONS

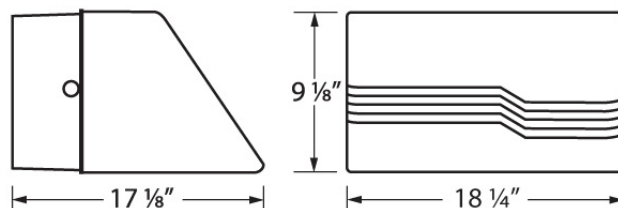

ORDERING INFORMATION

Sample Part Code: OSCPQ400L

OSC				L
SERIES	SOURCE	VOLTAGE	LAMP WATTAGE	LAMPS INCLUDED
OSC	[HP] : High Pressure Sodium [P] : Pulse Start Metal Halide	[E] : 480 [Q] : 120,208,240,277	[320] : 320 Watt *PSMH Only [350] : 350 Watt *PSMH Only [400] : 400 Watt	[L] : Lamp Included