



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
 tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

SF

LED Small Flood

HOUSING:

The LED Small Flood (SF) has a die-cast aluminum housing and a hinged lens frame, with captive stainless steel screws and has an architectural bronze UV resistant powdercoat finish.

LENS:

Clear flat tempered glass lens.

MOUNTING:

2 1/2" stem with 1/2" NPT threads.

ILLUMINATION:

Long life, energy saving CREE LEDs, Color temperature - 4700K, low junction temperature (Tj) for long life, low lumen depreciation, Low starting temp -30°C., Lumens per LED - Approx. 90-95.

SOURCE / WATTAGE:

LED: 20 Watt
 IC current controlled LED circuits

LED'S meet LM80 requirements photometric available on request


LISTING & RATINGS:

UL: Listed for wet locations.


WARRANTY:

Guaranteed for 3 year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

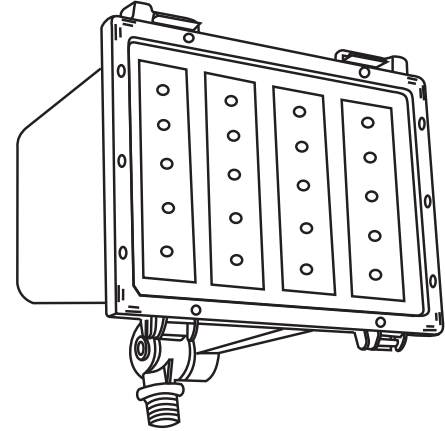

DIMENSIONS DATA

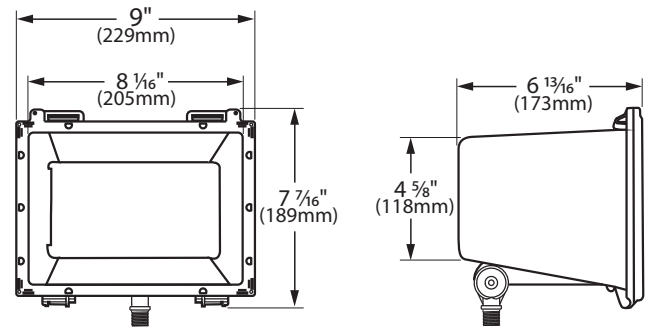

ORDERING INFORMATION

CATALOG#	DESCRIPTION	VOLTAGE	INPUT POWER
SFLED20W	20 WATT LED	120-277VAC	26.2 WATTS