

MODEL :	TYPE	
PROJECT :		
PREPARED BY :	DATE :	



SERIES SPECIFICATIONS

SLXPC SERIES

The SLXPC series adjustable thermoplastic LED exit sign and emergency lighting combination unit that offers long lamp life, energy efficiency and uniform illumination with adjustable round LED light heads.



LINE DRAWING

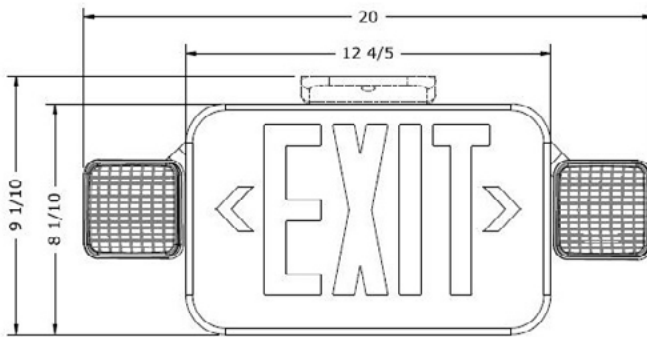

CONSTRUCTION

Housing

Injection molded, engineering-grade, UV-stabilized, UL 94V-0 flame rating, high-impact and corrosion-resistant thermoplastic housing.

LED Lamp Heads

Prismatic plastic lens

Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.

Reflector

High performance smooth thermoplastic reflector

BATTERY SPECIFICATIONS

Battery Type

3.6V Rechargeable Ni-Cad

Emergency Illumination

Minimum 90 Minutes

Battery Recharge Time

24 Hours.

Low Voltage Disconnect

Prevents battery from deep discharge

LED Indicator

Charge rate/power "ON" and push to test switch

Battery Charger

Two rate, fully automatic solid-state



MODEL :	TYPE	
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS CONT.

Operating Voltage 120/277 (Standard)	Frequency 50/60Hz	Input Watts Red 2.8 @ 120V 2.8 @ 277V Green 2.9 @ 120V 3.4 @ 277V
Input Amps Red 0.035 @ 120V 0.015 @ 277V Green 0.028 @ 120V 0.016 @ 277V		

MOUNTING SPECIFICATIONS

Backplate Snaps into place making internal electrical connections	Surface Mount "Easy Connect" backplate which fits most standard junction boxes. Suitable for wall or ceiling mount	Conduit Mount Mounts using knockouts on the backplate or on top of housing
--	--	---

Options

SD: Self-diagnostic test feature continually diagnoses unit's perfor- mance and tests system to ensure reliable operation and to meet electrical and life safety codes	RC Remote capable function can power up to 3W LED max (3.6VDC Output) for 90 minutes.
---	--

CERTIFICATIONS/WARRANTY

Listing UL Listed	Safety Certifications UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
Location Rating: Suitable for damp locations	
Warranty Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.	

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Sample Part Number: SLXPC3RWEMA

SLXPC	3		W		A
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	LED HEAD TYPE
SLXPC	[3] : Universal Single and Double Face	[R] : Red	[W] : White	[EM] : Battery Backup	[A] : Adjustable Heads
		[G] : Green		[RC] : Remote Capable	

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION