



FLUORESCENT

TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

UR Series

APPLICATIONS:

The UR Series is suitable for areas where balanced direct/indirect lighting is preferred. Creates a contemporary, bold look for a comfortable atmosphere.

CONSTRUCTION:

Cold rolled steel body for exceptional strength and durability. A direct/indirect perforated diffuser that effectively directs light while adding a soft glow to the fixture. Quarter turn latches secure channel cover for easy wire way access. Perforated center lens is easily removed for cleaning. Studs on either side of lens for hassle free relamping. U.L. listed for direct mounting on low density ceilings.

FINISH:

Housing is powder coat painted after fabrication. Three-stage iron phosphate pretreatment for maximum paint adhesion and rust inhibitors provide safe handling and corrosion protection. Parts are finished in a white high reflectance lighting grade baked enamel.

ELECTRICAL:

CONSULT FACTORY FOR BALLAST INFORMATION

WARRANTY:








Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


ORDERING INFORMATION

UR

Sample Part Code: UR2454D

						
SERIES	LAMP QTY	LENGTH	LAMP WATTAGE	VOLTAGE	EMERGENCY BALLAST	CABLE HANGER
UR: UR Series	1: 1 Lamp 2: 2 Lamp	4: 4'	28: 28W T5 32: 32W T8 54: 54W T5HO	A: 120V B: 277V D: 120-277V	BLANK: No options B1: 500 lumens 1 lamp B2: 1400 lumens 1 lamp B3: 1400 lumens 2 lamp** Factory Installed **T8 only	**OPTIONAL** CH: Cable Hanger kit Comes with: Canopies Power cord

MOUNTING INFORMATION

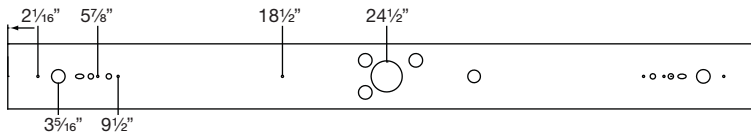

LAMP CONFIGURATION

