



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
 tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

W1

W1 Wall Pack

HOUSING:

W1 Series has a die cast aluminum housing, removable hinged door with gasket and captive stainless steel screws, coin plugs with O-rings for 1/2" conduit entry or photocell installation, and bronze powdercoat finish.

REFLECTOR:

Formed aluminum reflector

LENS:

Molded wedge shaped prismatic surface borosilicate glass lens with gasket.

SOCKET:

HID: Porcelain 4KV pulse rated medium base socket with nickel-plated screw shell.

MOUNTING:

Optional cast aluminum mounting plate mounts directly over a 4" recessed outlet box or use 1/2" surface mount conduit connection.

SOURCE / WATTAGE:

High Pressure Sodium: 35W to 100W
 Metal Halide: 50W to 100W


LISTING & RATINGS:

UL or CSA: Listed for wet locations.


WARRANTY:

Guaranteed for one year against mechanical defects in manufacturing.


*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

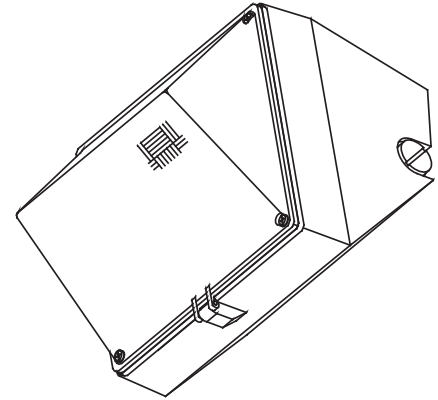

DIMENSIONS DATA

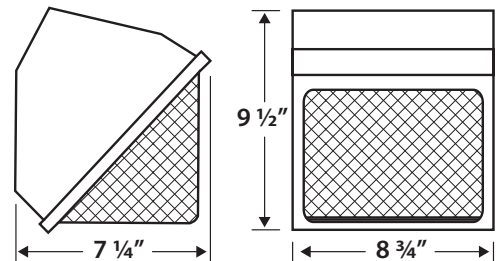

Max. Weight 12 lbs.

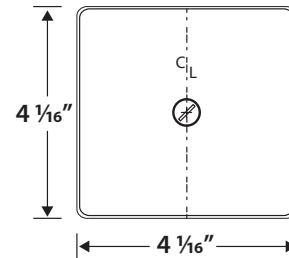

ACCESSORIES	
CATALOG#	DESCRIPTION
W1 GLASS	REPLACEMENT GLASS LENS
W1PLATE	MOUNTING PLATE
W1FC KIT	FULL CUTOFF KIT
W1GS KIT	GLARE SHIELD KIT
W1WG KIT	WIRE GUARD KIT



TAMLITE LIGHTING



SPECIFICATION & FEATURES

W1

W1 Wall Pack

ORDERING INFORMATION (HID)

CATALOG#	DESCRIPTION	VOLTAGE	BALLAST
HIGH PRESSURE SODIUM			
W1HPA35L	35 WATT HPS	120	R-NPF
W1HPA50L	50 WATT HPS	120	R-NPF
W1HPA70L	70 WATT HPS	120	R-NPF
W1HPA100L	100 WATT HPS	120	R-NPF
PULSE START METAL HALIDE			
W1MHQ50L	50 WATT MH	120/208/240/277	HX-HPF
W1MHQ70L	70 WATT MH	120/208/240/277	HX-HPF
W1MHQ100L	100 WATT MH	120/208/240/277	HX-HPF
Lamp included			

NOTES:

CONSULT FACTORY FOR BALLAST INFORMATION

Application and Performance Specification Information is Subject to Change Without Notification