



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING:

The W4 Series has a die cast aluminum housing, removable hinged door with gasket and captive stainless steel screws, coin plugs with O-rings for 1/2" conduit entry or photocell installation, and bronze powder coat finish.

REFLECTOR:

Formed aluminum reflector

LENS:

Molded wedge shaped prismatic surface borosilicate glass lens with gasket.

SOCKET:

HID: Porcelain 5KV pulse rated mogul base socket with nickel-plated screw shell.

MOUNTING:

Three cast-in mounting bosses on rear housing for mounting directly over a 4" recessed outlet box or use 1/2" surface mount conduit connection.

SOURCE / WATTAGE:

High Pressure Sodium: 250W to 400W
Metal Halide: 250W to 400W
Induction: 100W and 120W

LISTING & RATINGS:

CSA or UL: Listed for wet locations.

WARRANTY:


Guaranteed for one year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***



Catalog Number
Notes
Job/Title

W4

W4 Wall Pack

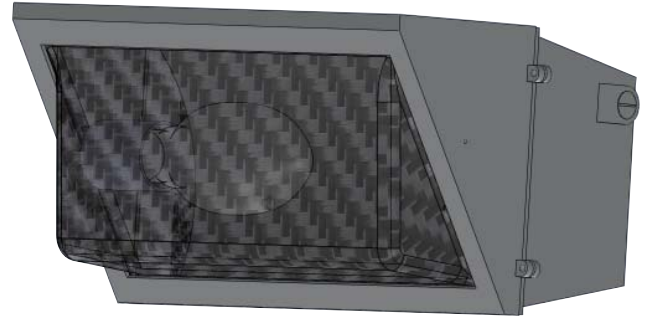

DIMENSIONS DATA

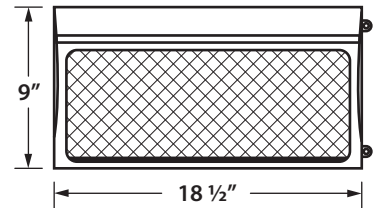

Max. Weight 30 lbs.

ACCESSORIES

CATALOG#	DESCRIPTION
W3/4LENS	REPLACEMENT GLASS LENS
W3/4FF	FRONT FRAME & LENS ASSEMBLY
W3/4FC KIT	FULL CUTOFF KIT
W3/4GS KIT	GLARE SHIELD KIT
W3/4LEX KIT	POLYCARBONATE GUARD KIT
W3/4WG KIT	WIRE GUARD KIT



SPECIFICATION & FEATURES

W4

W4 Wall Pack

ORDERING INFORMATION (HID)

CATALOG#	DESCRIPTION	VOLTAGE	BALLAST
HIGH PRESSURE SODIUM			
W4HPQ250L	250 WATT HPS	120/208/240/277	CWA
W4HPE250L	250 WATT HPS	480	CWA
W4HPQ400L	400 WATT HPS	120/208/240/277	CWA
W4HPE400L	400 WATT HPS	480	CWA
PULSE START METAL HALIDE			
W4PQ250L	250 WATT PSMH	120/208/240/277	CWA
W4PE250L	250 WATT PSMH	480	CWA
W4PQ320L	320 WATT PSMH	120/208/240/277	CWA
W4PE320L	320 WATT PSMH	480	CWA
W4PQ350L	350 WATT PSMH	120/208/240/277	CWA
W4PE350L	350 WATT PSMH	480	CWA
W4PQ400L	400 WATT PSMH	120/208/240/277	CWA
W4PE400L	400 WATT PSMH	480	CWA
Lamp included			

NOTES:

CONSULT FACTORY FOR BALLAST INFORMATION

ORDERING INFORMATION / SPECIFICATIONS (INDUCTION)

CATALOG#	VOLTAGE (60Hz)	WORKING FREQUENCY	CURRENT	POWER FACTOR	AMBIENT TEMP. RANGE
W4H100120L	120 (90-150)	210 kHz	.90 A	.98	-35° C / +50° C
W4H100277L	277 (250-305)	210 kHz	.39 A	.90	-35° C / +50° C
W4H120120L	120 (90-150)	210 kHz	1.08 A	.98	-35° C / +50° C
W4H120277L	277 (250-305)	210 kHz	.48 A	.90	-35° C / +50° C
Lamp included					

NOTES:

CONSULT FACTORY FOR DRIVER INFORMATION

LAMP SPECIFICATIONS (INDUCTION)

WATTAGE	CRI	INITIAL LUMENS @ 120V or 277V	LAMP LIFE
100	80	7600	100,000 hrs.
120	80	9125	100,000 hrs.

Application and Performance Specification Information is Subject to Change Without Notification