



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

HOUSING

Die cast aluminum housing with bronze powdercoat finish. Housing has a hinged junction box with three 1/2" coin plugs for side and top entry or installation of photo-control.

LENS

Clear flat glass lens

MOUNTING

Unit can be utilized as a wallpack or as a floodlight.

It can also be mounted as an uplight.

Wall mount using integral hinged junction box or flood mount using adjustable yoke bracket or 1/2" threaded knuckle.

All mounting options are included with unit.

LIGHT OUTPUT PERFORMANCE

WPFLD205K
TOTAL LUMENS : 1874.3
LUMENS PER WATT : 87.99
CRI : 75

COLOR TEMP. : 5000K
DISTRIBUTION : TYPE III CUTOFF
LIFE : 50000 Hrs

ELECTRICAL DETAILS

WPFLD205K
INPUT WATTAGE : 21.3W

INPUT VOLTAGE : 120-277V
FREQUENCY : 50/60 Hz
BALLAST FACTOR : .91
MIN START TEMP : -30 DEGREES C

WARRANTY

Guaranteed for 5 years against mechanical defects in manufacturing.

LISTINGS/RATINGS/COMPLIANCE

UL Listed wet locations
DLC certified

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

Catalog #:	02/10/2016
Project:	Type:
Prepared By:	

WPFLD Series

LED 20W Wallpack / Flood



Hinged box for wall mounting




1/2" Knuckle for box or ground stake mounting



Adjustable yoke for flat surface mounting



SPECIFICATIONS / DIMENSIONS

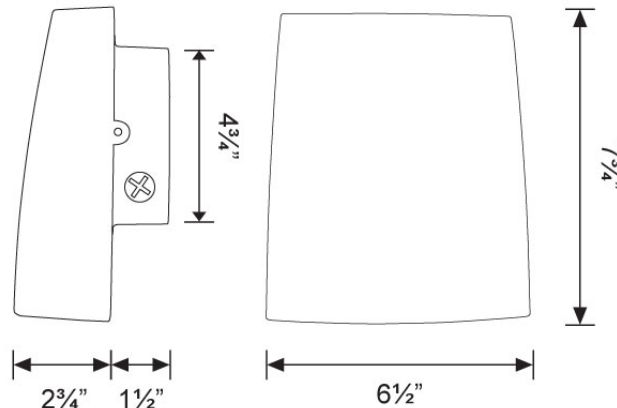

ORDERING INFORMATION

Sample Part Code: WPFLD205K

WPFLD		5K
SERIES	WATTAGE	COLOR TEMP
WPFLD	[20] : 20W	[5K] : 5000K