



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRR4RF-5CCTA

SERIES SPECIFICATIONS



TRR4RF-5CCTA

4", 5CCT Selectable LED Retrofit

These LED Retrofit Kits are compatible with most 4" recessed cans. TRR4RF-CCTA is designed with a white baffle construction, and comes with a dimmable LED driver. Comes with 3 tension fin clips for installation. Suitable for IC and Non-IC housings.



PHYSICAL SPECIFICATIONS

Housing: Aluminum

Lens Material: Polycarbonate Lens

Dimming Type: Triac




Trim Ring: Painted metal ring- White finish

Mounting Type: Recessed Housing

Ambient Temperature: -22°F To 104°F

Dimming Percentage: 10%-100%

LINE DRAWING

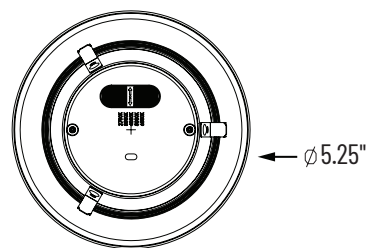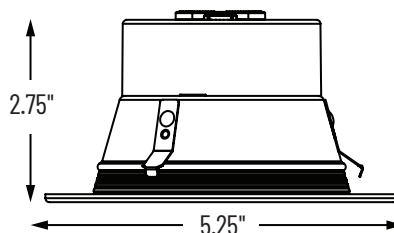



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRR4RF-CS

ORDERING INFORMATION

SERIES	DESCRIPTION	CCT SELECTABLE	FINISH
TRR4RF-5CCTA	4" LED Retrofit	2700K/3000K/3500K/4000K/5000K	White

LIGHTING & ELECTRICAL SPECIFICATIONS ELECTRICAL SPECIFICATIONS

SERIES	INPUT POWER (WATTS)	LPW	LUMENS @ 2700K	CRI	L70 (HOURS)
TRR4RF-5CCTA	13W	77	1,000	90	50,000

Input Voltage	120-277v
Frequency Range (Hz)	50-60 Hz
Efficiency @ Full Load	>87
Power Factor @ Full Load	>0.9

PHOTOMETRICS

