

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

CHDXRL SERIES

CHDXRL620 is an Chicago Approved Steel Emergency Light with two bright 5.4 Watt LED heads that offers 6 Volt Remote Capacity.



LINE DRAWING

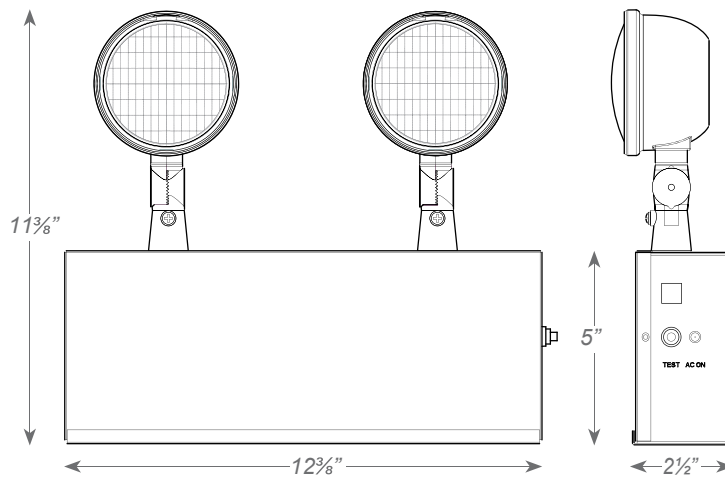

CONSTRUCTION

Housing
Durable 20 gauge steel

Transfer switch
Internal solid-state transfer switch automatically connects the internal battery to LEDs

Remote Capability
Remote capacity of 10W

LED Heads
Two 6V, 5.3W adjustable white LED lamp heads

Charger
Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Compatible Remote Heads
LSRH1-MULTI Series(1 Watt)
LSRH2-MULTI Series (2 Watts)

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS

Battery Type 6V Rechargeable Sealed Lead Acid	Emergency Illumination Minimum 90 Minutes	Battery Recharge Time 24 Hours
Low Voltage Disconnect Prevents battery from deep discharge	LED Indicator Charge rate/power "ON" and push to test switch	Battery Discharge Time 1.5 Hours
Operating Voltage 120/277	Frequency 60Hz	Operating Temp. 20°C ~ 50°C
Input Wattage 120V : 8.4W 277V : 9.4W	Input Amperage 120V : 0.08A 277V : 0.04A	

MOUNTING SPECIFICATIONS

Suitable for wall or conduit feed applications	Wall Mount Knockouts on the back for wall mount	Conduit Feed Side and top knockouts for conduit feed applications
--	--	--

CERTIFICATIONS/WARRANTY

Listing UL Listed	Compliance Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
Location Rating: Suitable for damp locations	City of Chicago Rating Meets City of Chicago requirements
Warranty Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.	

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Part Number: CHDXRL620

CHDXRL	6	20	
SERIES	VOLTAGE	WATTAGE	HOUSING COLOR
CHDXRL	[6] : 6 V	[20] : 20 Watts	[BLANK] : White
			[B] : Black