

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


### SERIES SPECIFICATIONS

**NEED DESCRIPTION** 

#### **EXS SERIES**



LINE DRAWING

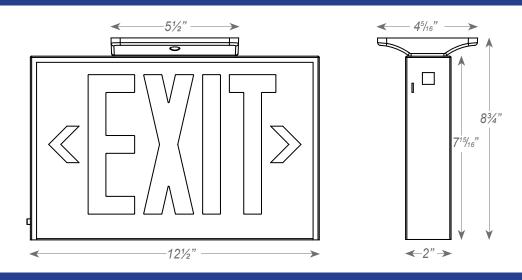

# CONSTRUCTION

#### Housing

Durable, powder coated 20-gauge steel construction.

### Transfer switch

Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Chevrons Field selectable steel knockout chevron directional indicators

### Illumination Ultra bright, long life Red or Green LED

#### Charger

Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Conversion Field selectable steel knockout chevron directional indicators





MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ELECTRICAL SPECIFICATIONS		
Battery Type	Emergency Illumination	Battery Recharge Time
4.8V Rechargeable NiCad	Minimum 90 Minutes	24 Hours
Low Voltage Disconnect Prevents battery from deep discharge	LED Indicator Charge rate/power "ON" and push to test switch	Battery Discharge Time 1.5 Hours
Operating Voltage	Frequency	Operating Temp
120/277	60Hz	0°C ~ 50°C

### AMPERAGE/WATTAGE

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EXS	3.8	3.8	0.034	0.020

# MOUNTING SPECIFICATIONS

Mounting canopy included for top or end mount

Universal K/O pattern on back plate for wall mount.

# OPTIONS

#### SD

Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes



APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION



MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

# CERTIFICATIONS/WARRANTY

Listing UL Listed Compliance

Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Location Rating: Suitable for damp locations

Warranty

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

# ORDERING INFORMATION

## Part Number: EXS1RWEM

EXS					
SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	OPERATION	OPTIONS
EXS	[1] : Single Face	[G] : Green	[B] : Black	[BLANK] : A/C Only	[BLANK] : No Option
	[2] : Double Face	[R] : Red	[W] : White	[EM] : Battery Backup	[SD] : Self Diagnostics

