



<b>CONTRACTOR:</b>	
<b>PROJECT:</b>	<b>DATE:</b>
<b>PREPARED BY:</b>	<b>MODEL#:</b> LSRMR-LEDRC

**DESCRIPTION**



**LSRMR series**

The LSRMR-LEDRC is a remote capable adjustable high lumen thermoplastic LED emergency light.



**FEATURES AND SPECIFICATIONS**

**Construction**

Injection-molded thermoplastic ABS housing  
UL 5VA flame rating

**Housing Color**

Traditional White

**Illumination**

Two adjustable 2.7W LED heads (520 Lumens)

**Color Temperature:**

6000K

**Installation**

Wall or ceiling mount

**Listings**

UL Listed

**Compliance**

UL 924, Damp Location IP20, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

**Location Rating**

Suitable for damp locations

**Warranty**

Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing.

**ELECTRICAL SPECIFICATION**

**Battery Type:** Lithium Iron Phosphate  
LiFePO4-9.6V 3000mAh

**Low Voltage Disconnect:** Prevents battery from deep discharge.

**Operating Voltage:** 120/277V

**Lamp head:** 2.7W per head

**Emergency Illumination:** Minimum 90 minutes

**Battery Recharge Time:** 24hrs.

**Lumen Output:** 520 lumens

**Battery Discharge Time:** 1.5hrs.

**LED Indicator:** Charge rate/power "ON" and push to test switch.


**Power Consumption:** Max 3.5W

**Ambient Temperature:** 10C - 40C

**Frequency:** 60 Hz

**Remote Watt Max:** 5.4W

**LINE DRAWING**

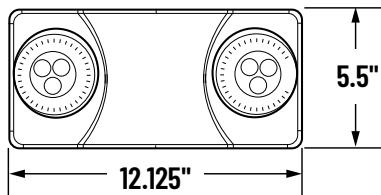



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LSRMR-LEDRC

**ORDERING INFORMATION**

EXAMPLE: LSRMR-LEDRC

Series	Housing Color	Options
LSRMR-LED	[ BLANK ] : WHITE	[ RC ] : REMOTE CAPABLE *

\* LSRH1/LSRH2 Series or WRLRH1/WRLRH2 Series

**PHOTOMETRIC REPORTS**

**Standard version** total 520lm output,  
Unit mount on 7.5FT height, 52FT spacing distance

