


CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXP-CS SERIES

SERIES SPECIFICATIONS



Multicolor LED's: 

LXP-CS SERIES

The LXP slim series thermoplastic LED exit sign offers a modern look with long lamp life, energy efficiency and uniform illumination; all components feature a snap-fit construction for speed and ease of installation.



CONSTRUCTION

Housing Material: Injection molded, engineering grade, UL-stabilized, UL94-0, high impact resistant thermoplastic

Chevrons: Easy snap out chevron directional indicators

Transfer Switch: Internal solid-state transfer switch automatically connects the internal battery to lamp heads

Illumination: Energy saving, long life, LED Red or Green letters

Charger: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

ELECTRICAL SPECIFICATIONS

Battery Type: Rechargeable Ni-Cad

Low Voltage Disconnect: Prevents battery from deep discharge

Operating Voltage: 120/277V

Emergency Illumination: Minimum 90 minutes

LED Indicator: Charge rate/power "ON" and push to test switch

Battery Recharge Time: 24hrs.

Battery Discharge Time: 1.5hrs.

CERTIFICATIONS/WARRANTY


Listing: UL Listed

Location Rating: Suitable for damp locations

Compliance: Meets UL924, cULus, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

Warranty: Guaranteed for five years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

LINE DRAWINGS

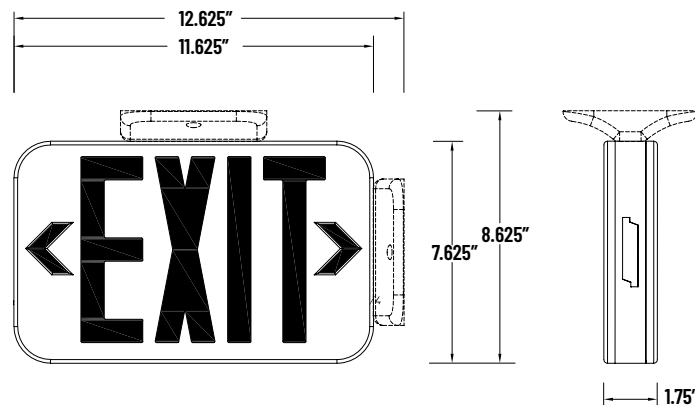



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: LXP-CS SERIES

ORDERING INFORMATION

Example: LXP3MWEM-CS

SERIES	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	STANDARD
LXP	[3]: Universal Single and Double Face	[M]: Multicolor (Green and Red)	[W]: White	[EM]: Battery Backup	[-CS]: Color Selectable

MOUNTING SPECIFICATIONS

Includes backplate with universal mounting pattern knockouts for simple back mounting

Quick install snap-fit canopy and mounting hardware for easy top or end mount.

Suitable for top, back, or side mount applications