


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

The RESLR-1 is the first Residential or Commercial applicable emergency light in the emergency lighting market. The RESLR-1 is a thermoplastic high lumen LED emergency light that simply plugs into a basic Nema 5-15 wall Socket and offers two 2 Watt SMD High Power LED heads that are fully adjustable, glare free and provide over 250 lumens of Egress lighting at 6k for 90 minutes in emergency operation.



LINE DRAWING

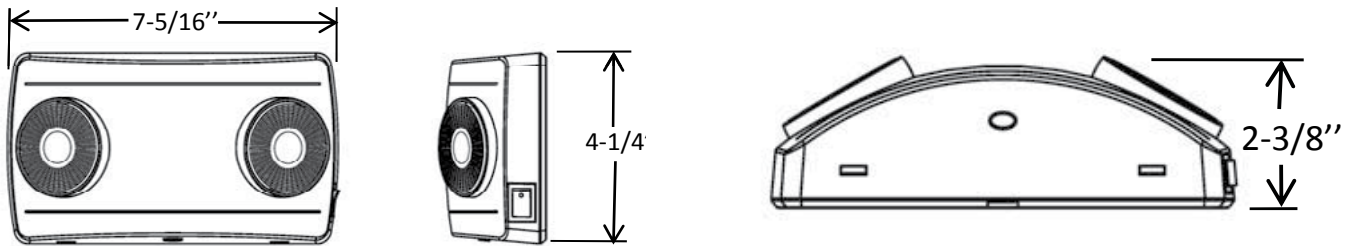

CONSTRUCTION

Housing
 Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic.

LED Lamp Heads
 Two fully adjustable glare-free round shaped light heads.

ELECTRICAL SPECIFICATIONS

Operating Voltage
 120-240 VAC

Frequency
 60Hz

Input Wattage
 1.2 Max

Battery Type
 3.6V Ni-Cad

Emergency Operation
 90 min.

Lumens
 250 lumens

Charge Time
 24 Hours

Color Temperature
 6000K


Rated Life
 L70 35,000 Hrs.

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

MOUNTING SPECIFICATIONS

Socket
 Install on wall socket directly.

LUMINOUS INTENSITY DISTRIBUTION

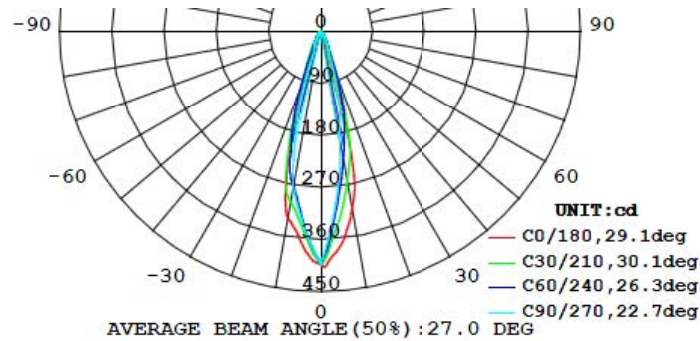

CERTIFICATIONS/WARRANTY

Listing
 UL Listed

Location Rating:
 Suitable for dry locations

Warranty

Guaranteed for three years from the purchase date of the product, against mechanical defects in manufacturing. Batteries are pro-rated for two years.

ORDERING INFORMATION

Sample Part Number: RESLR-1

Carton Dimensions: 7.8x4.44x2.51IN
 198x113x64MM

Case Dimensions: 16.34x8.46x9.84IN
 415x215x250MM

Case Qty: 12 Pcs

RESLR-1	
SERIES	HOUSING COLOR
RESLR-1	[BLANK] : White