



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRR56RF-CS

SERIES SPECIFICATIONS



TRR56RF-CS

5/6", CCT Selectable LED Retrofit

These LED Retrofit Kits are compatible with most 5" and 6" recessed cans. The TRR56RF-CS is designed with a white baffle construction, and dimmable LED driver rated for 50,000 hours. Comes with 2 torsion clips. Suitable for IC and Non-IC housings.



PHYSICAL SPECIFICATIONS

Housing: Steel

Trim Ring: Painted metal ring

Ambient Temperature: -30°C (-22°F) - +40°C (104°F)

Lamp Type: SMD

Number of Lamps: 30

Lens Type: Frosted

Lens Material: Polycarbonate lens



Color: White

Mounting Type: Recessed housing

Dimming Percentage: 10%-100%

Dimming Type: Triac

LINE DRAWING

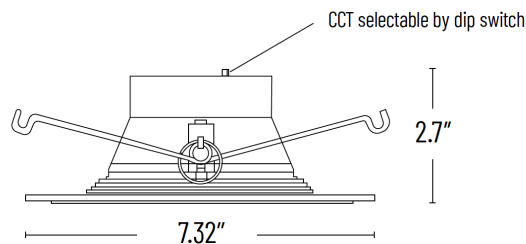



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#: TRR56RF-CS

ORDERING INFORMATION

EXAMPLE: TRR56RF-CS

SERIES	SIZE	TYPE	COLOR TEMP.
TRR	[56] : 5/6"	[RF] : Retrofit	[-CS] : 3000K, 4000K, 5000K

TECHNICAL SPECS

Input Voltage	120V
Input Power	13W
Lumens	800lm (3000K)
Color Temperature	CCT Selectable (3000K, 4000K, 5000K)
Operating temperature	From -30° to +40°
Frequency	60 Hz
CRI	>90
LED Lifespan	50,000 HRS
Dimmable	10-100%*