

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL #: TVDISM

## INSTALLATION INSTRUCTIONS

### Materials & Dimensions

#### Materials Included :

- TVDISMBODY x 1
- TVDISMEND x 1
- Toggle Bolts x 4
- Mounting Screws x 4

#### Additional Materials Required :

- AC Power Whip may also be required

#### Dimensions

- TVDISM-14KIT-WT  
12"x48"x5 ¾"
- TVDISM-22KIT-WT  
24"x24"x5 ¾"
- TVDISM-24KIT-WT  
24"x48"x5 ¾"

### WARNING

#### READ PRIOR TO INSTALLATION.

#### INSTALLATION SHOULD BE CARRIED OUT BY A CERTIFIED ELECTRICIAN.

#### WARNING - RISK OF ELECTRICAL SHOCK

#### WARNING - RISK OF BURNS

#### WARNING - RISK OF FIRE

- Always turn off power prior to installation or replacement.
- Verify that the supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical grounded connections in accordance with the latest edition of the National Electric Code (NEC) and applicable local code requirements.
- If the supply wire is damaged, it must be replaced by the manufacturer or their service agent or a qualified person to avoid hazard.
- All wire connections should be capped with certified wire connections.
- To reduce the risk of electrical shock or fire, do not expose this apparatus to rain or moisture.
- Follow all manufacturer's warnings and recommendations for the driver type, mounting position, methods, replacement and recycling.
- Keep any combustible and other materials that can burn away from the luminaire.
- Incorrect installation may result in electrical shock or a risk of a fire.
- Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities.
- If electrical appliances are disposed of in a landfill or dump, hazardous substances can be damaging to health and well-being.
- Contact your local government for information regarding the collection system available.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- To reduce the risk of electrical shock, do not remove cover and caps, fitting must be grounded.
- No user-serviceable parts inside.
- Do not use when enclosure is broken.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- Indoor use only.
- This product must be installed in accordance with the applicable installation code by a professional electrician familiar with electrical installation.


**THIS ENCLOSURE IS NOT TO BE USED AS A JUNCTION BOX. ALL WIRING MUST RUN TO A CERTIFIED BOX.**

CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL #: TVDISM


## INSTALLATION INSTRUCTIONS

### INSTALLATION INSTRUCTIONS


1. Secure the TVDISMBODY to the ceiling using hardware appropriate for the ceiling type. Then wire power supply to panel in accordance with Panel Installation Instructions and the National Electrical Code.

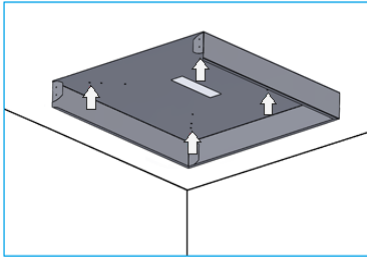

2. Slide wired panel into the surface mount through the open end.

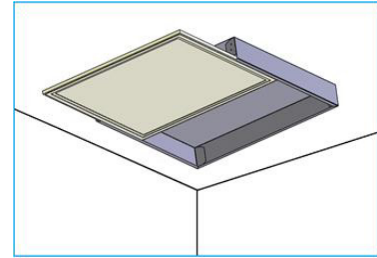

3. Close the surface mount using the TVDISMEND.

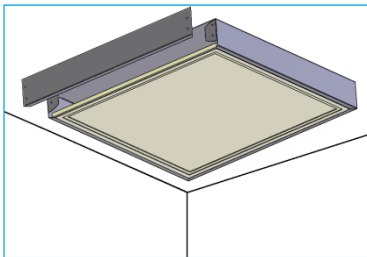

4. Secure using the 4 screws provided.

