

MODEL:		TYPE
PROJECT:		
PREPARED BY:	DATE:	

SERIES SPECIFICATIONS ABFQ SERIES

The ABFQ series bath fans are ultra quiet, high performance, bath fans designed to exhaust air quietly and efficiently.











LINE DRAWING





CONSTRUCTION

Housing Material 26GA galvanized steel

Motor Type Centrifugal type blower wheel

Duct Diameter 6"

Blower Wheel Centrifugal type Collar

Detachable 6" polymeric collar includes a light weight built in back draft damper.

Grill Material Polymeric resin

Grill Mounting Torsion spring clips

Overload Protection Built-in overload disconnect

ELECTRICAL SPECIFICATIONS

Input Voltage Frequency Fan Wattage 120 VAC 60 Hz 33W





MODEL:		TYPE
PROJECT:	PROJECT :	
PREPARED BY:	DATE:	

ELECTRICAL SPECIFICATIONS CONT.


Static Pressure Min. Static Pressure Max. Air Volume (CFM) Min.

0.1 0.25 110

Air volume (CFM) Max. Sones Max. Lamp Wattage

26W CFL 100 0.9

PERFORMANCE SPECIFICATIONS

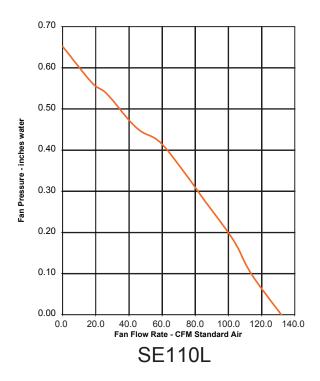

CERTIFICATIONS/WARRANTY

Location Rating: Listing

Suitable for Damp locations **ETL Listed**

Warranty

Guaranteed for one year from the purchase date of the product, against mechanical defects in manufacturing.





MODEL:		TYPE
PROJECT:		
PREPARED BY:	DATE :	

ORDERING INFORMATION

Part Number: ABFQ110L

ABFQ	110	L
SERIES	CFM	OPTIONS
ABFQ	[110] : 110 CFM	[L] : Light