



FLUORESCENT

TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

CT4 Series

APPLICATIONS:

The fixture is IP67 rated for indoor and outdoor use in locations where high pressure hose downs are required.

CONSTRUCTION:

Impact resistant acrylic lens with maximum light transmission and longevity. Reinforced fiberglass housing polyurethane gasket with no seams. Gear tray is prepainted, cold rolled steel, with an enhanced aluminum reflector and is supported by 4 stainless steel spring fittings.

RATING:

This IP rating is used to specify the strength of the enclosure that surrounds electronic equipment and is determined by specific tests.

6 = Totally protected against dust


7 = Protected against the effect of immersion between 15cm and 1m

ELECTRICAL:

CONSULT FACTORY FOR BALLAST INFORMATION

WARRANTY:

Guaranteed one year from the purchase date of the product, against mechanical defects in manufacturing.

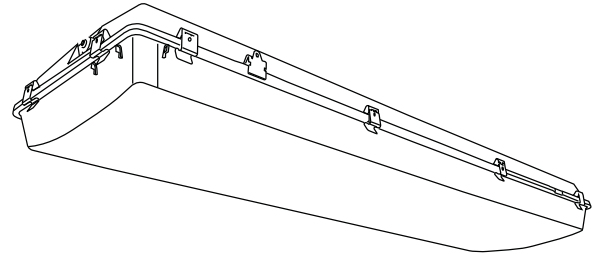

SPECIFICATIONS







LENGTH:	51 15/16"
WIDTH:	14 3/4"
DEPTH:	6 1/8"

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***


ORDERING INFORMATION

CT4 Series

Sample Part Code: CT4428A

					
SERIES	LAMP QTY	LENGTH	LAMP WATTAGE	VOLTAGE	EMERGENCY BALLAST
CT: CT Series	4: 4 Lamp	4: 4'	28: 28W T5 32: 32W T8 54: 54W T5HO	A: 120 D: 120-277	BLANK: No options B1: 500 lumens 1 lamp B2: 1400 lumens 1 lamp B3: 1400 lumens 2 lamp** Factory Installed **T8 only

MOUNTING INFORMATION

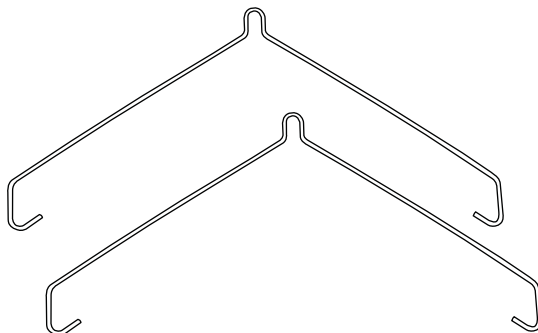

2-V HOOK BRACKETS INCLUDED

LAMP CONFIGURATION

