



TAMLITE LIGHTING

660 NW Peacock Blvd. Port St. Lucie, FL 34986
tel: (772) 878-4944 or on the web at www.tamliteusa.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

DESCRIPTION:

The EXPT Series Ultra Thin Thermoplastic LED Exit Signs offer long lamp life, energy efficiency and uniform illumination in an economical package.

CONSTRUCTION:

The EXPT is injection molded, UV-stable thermoplastic, UL94V-0 flame rating, impact, scratch, fade and corrosion-resistant. Easy to install snap-fit faceplate and backplate and has the option of second faceplate for double face applications has 6" letters with 3/4" stroke width the chevron directional indicators can be easily removed or reinserted as necessary comes in red or green letters.

ILLUMINATION:

Long life, energy saving LED lamps, red or green LED/letters.

ELECTRICAL:

Dual 120V/277V voltage rated for use in damp locations has AC power indicator and LVD (low voltage disconnect) prevents battery from deep discharge. Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Long-life, maintenance-free, rechargeable NiCd battery.

CODE COMPLIANCE:

UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code compliant, NEC and OSHA compliant.

MOUNTING:

May be top, back or end mounted. All signs include quick-install snap-fit canopy and mounting hardware for easy top or end mount installation. Includes backplate with universal mounting pattern knockouts for simple back mounting.

WARRANTY:


Guaranteed for five year against mechanical defects in manufacturing.

*** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***

EXPT Series Ultra Thin Thermoplastic Exit Sign



DIMENSIONS DATA

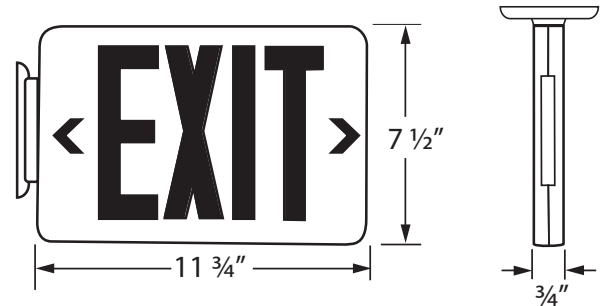

ORDERING INFORMATION

EXPT

Sample Part Code: EXPT1RWEM

